

Overview 0

Cabinets 1

Wall mounted cases 2

Accessories for cabinets and wall mounted cases 3

Climate control 4

Desk-top cases 5

Subracks/ 19" chassis ... 6

Front panels, plug-in units .. 7

Systems 8

Power supply units 9

Backplanes .. 10

Connectors, front panel component system 11

Appendix 12

Cabinets - VARISTAR LHX 3




01008029



01007010



01007014

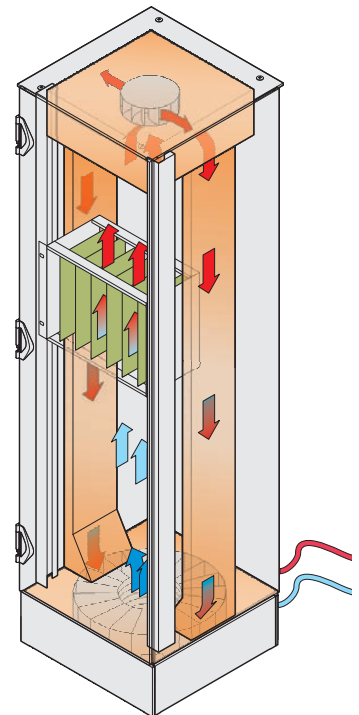

01007055

Top cover with fan
- Fan unit in top cover
- Airflow through channels in side panel
- Easy maintenance and exchange

Air/water heat exchanger in base/plinth
- Extractable
- Water connection from rear, optionally from front
- Cable ducting to rear, can be sealed with slide covers

Advantages:
By separating the heat exchanger (in the base/plinth) from the fan (in the top cover), the cold air flows evenly through the cabinet. Reflowing of the warm air to the heat exchanger through channels in the side panels.

Applications:
Measuring and test devices in industrial areas, e.g.:
- Temperature sensitive precision measurements
- Engine and transmission test bench



Downloads and further important information can be found on the Internet under www.schroff.biz

Air/water heat exchanger for measuring and test equipment

- Complete cabinet to protection class IP 55 with heat exchanger in base/plinth and fan tray in top cover
- Even circulation of cold air within the cabinet, no air short circuits as with side-by-side mounted units
- Cooling capacity up to 3 kW
- Very low noise level of 45 dB(A)


VARISTAR
Platform 1.4
Dimensions 1.8

VARISTAR LHX 3 1.238



VARISTAR LHX 3

- Air/water heat exchanger in base/plinth
- Airflow through channels in side panel
- Leakage safety

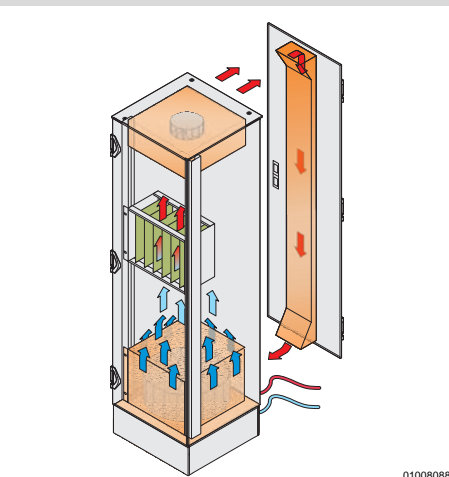

VARISTAR LHX 19" chassis, available on request

- Air/water heat exchanger as 19" chassis
- Airflow through channels in rear door (cabinets may be mounted side-by-side)
- Devices with different airflows may be used (e.g. from left to right or from front to rear)
- Variable air outlet in 19" chassis, thus selective direction of cold air

ServicePLUS

- e.g. climate control, complete assembly, cabling (power supply), function test
- e.g. delivery to point of use, erection service, commissioning, replacement service, maintenance, repairs, replacement parts
- e.g. custom solutions (special sizes)



www.schroff.biz/ServicePLUS

VARISTAR
Electronics 1.10
VARISTAR
EMC..... 1.54
VARISTAR
Seismic 1.84
VARISTAR
Datacom and
Networking
Technology 1.124

Cabinets - VARISTAR LHX 3

VARISTAR LHX 3




01007015

- Cabinet in accordance with protection class IP 55, RAL 7021, with glass front door
- Air/water heat exchanger (3 kW) in base/plinth (extractable)
- Very low noise level of 45 dB(A)
- Static load-carrying capacity 800 kg (Heavy-Duty frame)

Delivery comprises (completely assembled and earthed)

Item	Qty	Description
1	1	Welded basic frame, Heavy-Duty, St profile, zinc-plated, RAL 7021, IP 55, with all-round gasket
2	1	Flat top cover, St, RAL 7021
3	1	Radial fan, 230 V _{AC} , assembled on cross member, SCHUKO/UTE connector, cable length 1.5 m
4	1	Front door, glass, frame RAL 7021, 180° hinge, multi-point locking, lever handle for optional DIN profile half cylinder
5	1	Rear door, St, RAL 7021, 180° hinge, multi-point interlocking, lever handle for optional DIN profile half cylinder
6	2	Side panel, screwed, St, RAL 7021, with ventilation duct
7	1	Base/plinth with base plate, St, RAL 7021, height 200 mm, removable covers at front and rear, integrated feet; cable ducting to rear, can be sealed with slide covers
8	4	19" panel/slide mount with EIA cut-outs, St, RAL 7021, 175 mm recessed at front, 500 mm distance between front and rear 19" plane
9	1	Air/water heat exchanger, 3 kW, RAL 7021; integrated in base/plinth, extractable
10	1	User manual

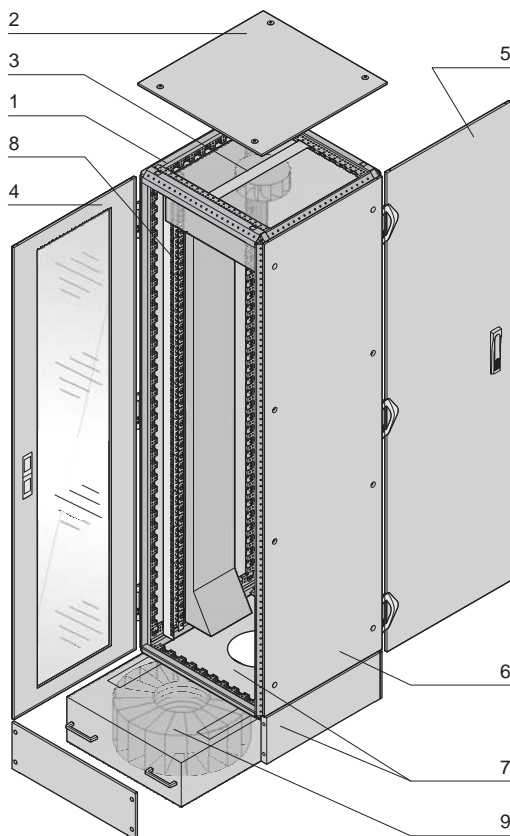

01007061

Order Information

Height mm	Usable height U	Width mm	Depth mm	Part no.
2000	34	600	800	10130-193
2200	38	600	800	10130-194
DIN profile half cylinder, common locking for lever handle (1 key fits all locks) incl. 2 keys				25127-995
Thermostat with mains/line connector , 230 V _{AC} , SCHUKO/UTE connector, IEC-320 female connector, 1 piece				20118-750

Note


- Further dimensions and versions available on request (e.g. with heat exchanger as 19" chassis or with airflow in the rear panel)
- Technical data see page 1.239



For further information www.schroff.biz/oneclick
oneClick search code = Part no.

Cabinets - VARISTAR LHX 3

Technical data LHX 3

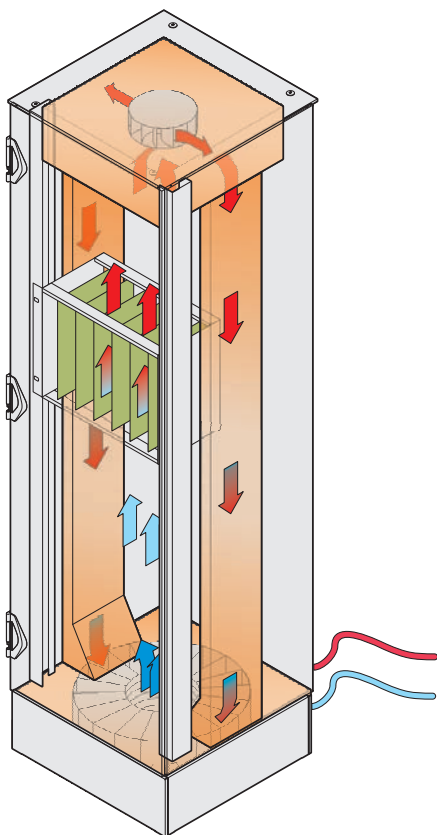


01007055

A fan sucks in the warm air at the top and leads it downwards through the lateral air channels in the side panels to the air/water heat exchanger. The cold air is let into the cabinet at the bottom.

Diagram of LHX 3 characteristics

Usable cooling capacity in kW

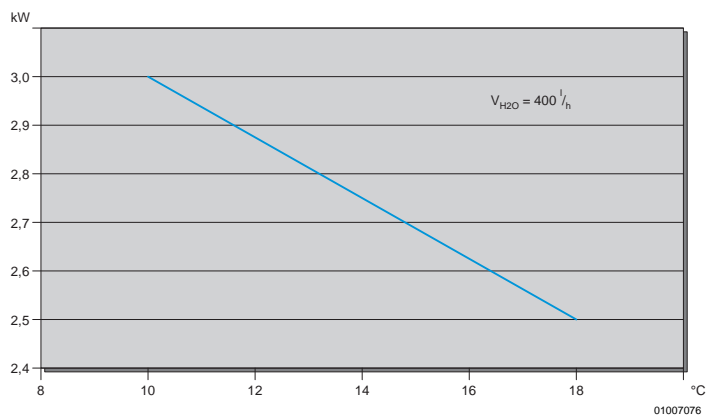

Incoming water temperature

01007076

Technical data LHX 3

Cooling capacity

Usable cooling capacity **3 kW**
(cooling water inlet temperature 10° C,
air exit temperature 20° C)

Water circuit

Cooling medium ¹⁾	Water
Water inlet temperature ²⁾	6 ... 16 °C
Water flow volume	up to 2.0 m ³ /h
Max. water pressure	6 bar
Static pressure loss in device at 0.5 m ³ /h	0.1 bar
Water conduit	Copper
Water connection inlet/outlet	Rp 1/2"
Connection condensat drain	Ø 10 mm

Air circuit

Airflow volume 900 m³/h

Electrical data

Supply voltage, single phase	230 V _{AC} , 50/60 Hz
Current consumption	0.38 A
Power consumption	85 W
Apparent power at full load	120 VA
Protection fuse	2 A

General Data

Cabinet type of protection	IP 55
Ambient temperature during transport	-25 ... 70 °C
Ambient temperature outside of cabinet (during operation)	5 ... 70 °C
Relative humidity level	5 ... 95 %
Noise level at 100 % fan performance	45.2 dB(A)
Weight: cabinet/heat exchanger	approx. 115 kg/35 kg

Dimensions of air/water heat exchanger

Height	199 mm
Width	464 mm
Depth	425 mm
	(465 mm with handles)

1) For an optimal operation of the air/water heat exchanger the demands on the water quality have to be fulfilled (VDE 3803, please see user manual)

2) If the water inlet temperature falls short of 16 °C the formation of condensation should be anticipated