




Your Advantages

- 8 time ranges in one unit
- Simplified storage
- High accuracy
- Quick setting of long time values


Features

- According to IEC/EN 61 812-1
- 8 time ranges from 0.05 s to 300 h selectable via rotational switches
- Voltage range AC/DC 12 ... 240 V
- Adjustment aid for quick setting of long time values
- Suitable for 2-wire proximity sensor control
- 2 changeover contacts, one programmable as instantaneous contact
- LED indicators for operation, contact position and time delay
- Wire connection: also 2 x 1.5 mm² stranded ferruled, or 2 x 2.5 mm² solid DIN 46 228-1/-2/-3/-4
- As option connection of a remote potentiometer
- As option with time interruption / time adding input
- As option with pluggable terminal blocks for easy exchange of devices
 - with screw terminals
 - or with cage clamp terminals
- 22.5 mm width

Options with Pluggable Terminal Blocks



Screw terminal
(PS/plugin screw)




Cage clamp
(PC/plugin cage clamp)

Notes

Removing the terminal blocks with cage clamp terminals

1. The unit has to be disconnected.
2. Insert a screwdriver in the side recess of the front plate.
3. Turn the screwdriver to the right and left.
4. Please note that the terminal blocks have to be mounted on the belonging plug in terminations.

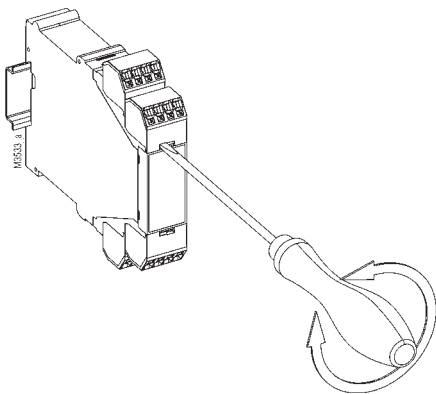

Approvals and Marking



* see variants


Application

Time-dependent controllers


Indications

- | | |
|---------------------------------|--|
| green LED: | on when voltage connected |
| yellow LED "R/t": | shows status of output relay and time delay: |
| - Flashing (long on, short off) | output relay not active; time delay |
| - Continuously on: | output relay active after time delay |

Function Diagram

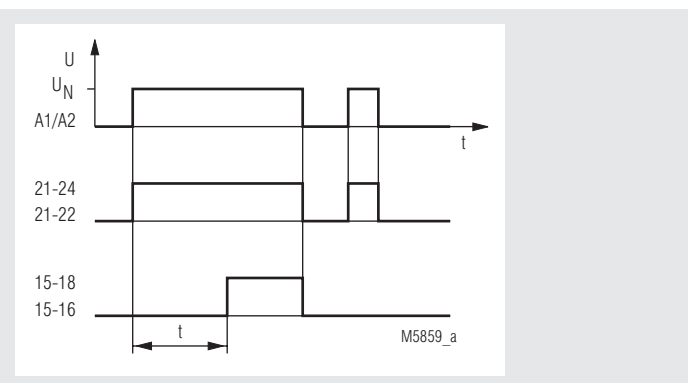

Circuit Diagrams

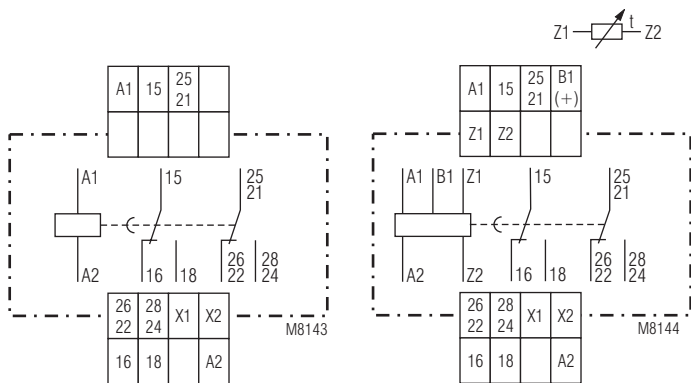

MK 9906N.82

MK 9906N.82/500

Notes

Control of A1-A2 with proximity sensors

The input can be controlled by DC 3 wire or AC/DC 2 wire proximity sensors. For operating voltage > 24 V and usage of sensors without built-in short circuit protection a protection resistor on A1 is recommending to reduce the inrush current. The dimension is as follows:

$$R_v \approx \text{operating voltage} / \text{max. switching current of sensor}$$

The series resistor must not be selected higher than necessary.

Max. values are:

| | | | | |
|----------------------------|--------------|--------------|--------------|----------------------|
| Operating voltage: | 48 V | 60 V | 110 V | 230 V |
| Series resistor R_v max: | 270 Ω | 390 Ω | 680 Ω | 1.8 k Ω (1 W) |

Instantaneous contact

By external wire links the output function of the device can be altered from 2 delayed contacts to 1 delayed **and** 1 instantaneous contact. The instantaneous contact switches when the operating voltage is connected. To terminals X1 and X2 no other voltage potentials must be connected, as the unit might be damaged.

Adjustment assistance

The flashing period of the yellow LED is $1 \text{ s} \pm 4\%$ and can be used to adjust the time. Especially on the lower end of scale and for long times it is suitable as the multiplication factors between the different time ranges are exact without tolerance.

Example:

The required time is 40 min. It has to be adjusted within the range 3 ... 300 min. The time check takes too long as several timing cycles would be necessary for a precise value.

For faster adjustment the setting is made to 0.03 ... 3 min. On this range the potentiometer should be set to 0.4 min (= 24 sec). With the right potentiometer setting the LED must show 24 flashing cycles. After that the time range is switched over to 3 ... 300 min and the setting is complete.

Time interruption / Time adding

With the model MK 9906N.82/500 the timing cycle can be interrupted by controlling input B1 (+) with control voltage. Removing the control signal will continue the timing cycle (time addition). When time is interrupted the yellow LED goes off.

Control input B1

The control input B1 (+) has to be supplied with voltage against A2. The control signal could be the same as the auxiliary/control voltage of A1 or any other voltage between 12 and 240 V AC or DC. Operating a parallel load between B1 and A2 is also possible, which allows cost saving circuits.

Notes


Remote potentiometers

With the variant MK 9906N.82/500 the time setting can also be made via remote potentiometer of 10 k Ω ms. It is connected to the terminals Z1-Z2. The corresponding potentiometer on the relay has to be set to min. If no remote potentiometer is required the terminals Z1-Z2 have to be linked.

The wires to the remote potentiometers should be installed separately from the lines with mains voltage. If this is not possible, a screened cable is recommended where the shield is connected to Z2.

To terminals Z1 and Z2 no external voltage must be connected, as the unit might be damaged.

Setting

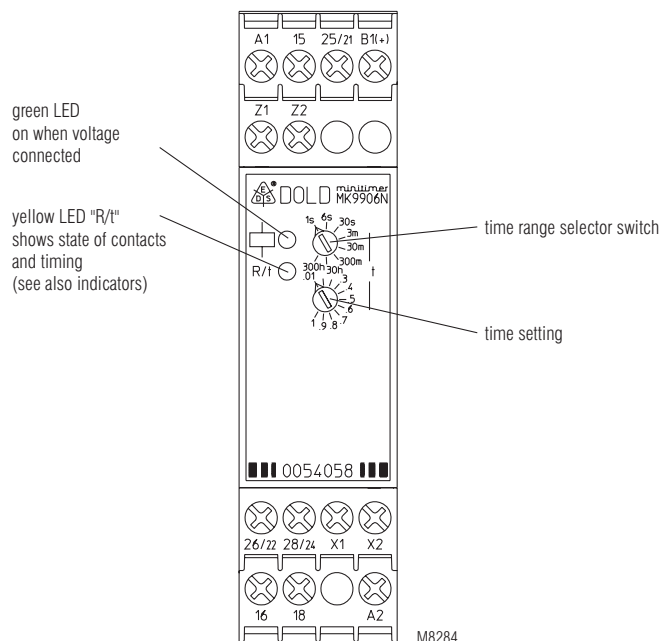

Technical Data**Time circuit**

| | | |
|---------------------|---|----------------|
| Time ranges: | 8 time ranges settable via rotational switch: | |
| | 0.05 ... 1 s | 0.3 ... 30 min |
| | 0.06 ... 6 s | 3 ... 300 min |
| | 0.3 ... 30 s | 0.3 ... 30 h |
| | 0.03 ... 3 min | 3 ... 300 h |
| | continuous 1:100 on relative scale | |

Time setting t:**Recovery time:**

| | |
|-------------------------|--|
| at DC 24 V: | approx. 15 ms |
| at DC 240 V: | approx. 50 ms |
| at AC 230 V: | approx. 80 ms |
| Repeat accuracy: | ± 0.5 % of selected end of scale value + 20 ms |

Voltage and

| | |
|------------------------------|---|
| temperatue influence: | ≤ 1 % with the complete operating range |
|------------------------------|---|

Input

| | | |
|---|---|-----------------------------------|
| Nominal voltage U_N: | AC/DC 12 ... 240 V | |
| Voltage range: | 0.8 ... 1.1 U_N | |
| Frequency range (AC): | 45 ... 400 Hz | |
| Nominal consumption | | |
| at AC 12 V: | approx. 1.5 VA | |
| at AC 24 V: | approx. 2 VA | |
| at AC 240 V: | approx. 3 VA | |
| at DC 12 V: | approx. 1 W | |
| at DC 24 V: | approx. 1 W | |
| at DC 240 V: | approx. 1 W | |
| Release voltage (A1/A2) | | |
| AC 50 Hz: | Delayed contact approx. 7.5 V | Instantaneous contact approx. 3 V |
| DC: | approx. 7 V | approx. 3.3 V |
| Max. permitted residual current with 2-wire proximity sensor control (A1-A2) | | |
| up to AC/DC 150 V: | AC resp. DC 5 mA | |
| up to AC/DC 264 V: | AC resp. DC 3 mA | |
| Control voltage (B1/A2) | | |
| MK 9906N.82/500: | AC/DC 12 ... 240 V | |
| Voltage range (B1/A2): | 0.8 ... 1.1 U_N | |
| Control current (B1) | | |
| MK 9906N.82/500: | approx. 1 mA, over complete voltage range | |
| Release voltage (B1/A2) | | |
| MK 9906N.82/500 | | |
| AC 50 Hz: | approx. 3.5 V | |
| DC: | approx. 3 V | |

Output**Contacts**

| | | |
|-----------------------|---|--|
| MK 9906N.82: | 2 changeover contacts, one programmable as instantaneous contact: | |
| without bridge X1-X2: | 25-26-28 delayed changeover contact | |
| with bridge X1-X2: | 21-22-24 instantaneous contact at U_N on A1-A2 | |
| | 2 x 4 A | |

**Thermal current I_{th} :
Switching capacity**

| | | |
|-------------|----------------|-------------------|
| to AC 15 | | |
| NO contact: | 3 A / AC 230 V | IEC/EN 60 947-5-1 |
| NC contact: | 1 A / AC 230 V | IEC/EN 60 947-5-1 |
| to DC 13: | 1 A / DC 24 V | |

Electrical life

| | |
|----------------------------|--|
| to AC 15 at 1 A, AC 230 V: | 1.5 x 10 ⁵ switching cycles IEC/EN 60 947-5-1 |
|----------------------------|--|

Permissible switching frequency:

| | |
|--|-----------------------------|
| | 36 000 switching cycles / h |
|--|-----------------------------|

Short circuit strength

| | |
|--------------------------|--------------------------|
| max. fuse rating: | 4 A gL IEC/EN 60 947-5-1 |
|--------------------------|--------------------------|

| | |
|-------------------------|---|
| Mechanical life: | ≥ 30 x 10 ⁶ switching cycles |
|-------------------------|---|

Technical Data**General Data**

| | | |
|--|--|-------------------|
| Operating mode: | Continuous operation | |
| Temperature range: | - 20 ... + 60°C | |
| Clearance and creepage distances | | |
| rated impuls voltage / pollution degree: | 4 kV / 2 | IEC 60 664-1 |
| EMC | | |
| Electrostatic discharge: | 8 kV (air) | IEC/EN 61 000-4-2 |
| Fast transients: | 2 kV | IEC/EN 61 000-4-4 |
| Surge voltages between wires for power supply: | 1 kV | IEC/EN 61 000-4-5 |
| HF-wire guided: | 10 V | IEC/EN 61 000-4-6 |
| Degree of protection | | |
| Housing: | IP 40 | IEC/EN 60 529 |
| Terminals: | IP 20 | IEC/EN 60 529 |
| Housing: | Thermoplastic with V0 behaviour according to UL subject 94 | |
| Vibration resistance: | Amplitude 0.35 mm, frequency 10 ... 55 Hz, IEC/EN 60 068-2-6 | |
| Climate resistance: | 20 / 060 / 04 IEC/EN 60 068-1 | |
| Terminal designation: | EN 50 005 | |
| Wire connection | DIN 46 228-1/-2/-3/-4 | |
| Screw terminals (integrated): | 1 x 4 mm ² solid or 1 x 2.5 mm ² stranded ferruled or 2 x 1.5 mm ² stranded ferruled or 2 x 2.5 mm ² solid | |
| Insulation of wires or sleeve length: | 8 mm | |
| Plug in with screw terminals | | |
| max. cross section for connection: | 1 x 2.5 mm ² solid or 1 x 2.5 mm ² stranded ferruled | |
| Insulation of wires or sleeve length: | 8 mm | |
| Plug in with cage clamp terminals | | |
| max. cross section for connection: | 1 x 4 mm ² solid or 1 x 2.5 mm ² stranded ferruled | |
| min. cross section for connection: | 0.5 mm ² | |
| Insulation of wires or sleeve length: | 12 ±0.5 mm | |
| Wire fixing: | Plus-minus terminal screws M 3.5 box terminals with wire protection or cage clamp terminals | |
| Mounting: | DIN rail | IEC/EN 60 715 |
| Weight: | 150 g | |

Dimensions**Width x heigth x depth**

| | |
|--------------|--------------------|
| MK 9906N: | 22.5 x 90 x 97 mm |
| MK 9906N PC: | 22.5 x 111 x 97 mm |
| MK 9906N PS: | 22.5 x 104 x 97 mm |

UL-Data

Switching capacity:

Ambient temperature 60°C: Pilot duty B300
5A 250Vac G. P.

Wire connection:
60°C / 75°C copper conductors only
Screw terminals fixed: AWG 20 - 12 Sol/Str Torque 0.8 Nm
Plug in screw: AWG 20 - 14 Sol Torque 0.8 Nm
AWG 20 - 16 Str Torque 0.8 Nm
Plug in cage clamp: AWG 20 - 12 Sol/Str



Technical data that is not stated in the UL-Data, can be found in the technical data section.

Standard Type

MK 9906N.82/61 AC/DC 12 ... 240 V 0.05 s ... 300 h
Article number: 0057517

- Output: 2 changeover contacts, one programmable as instantaneous contact
- Nominal voltage U_N : AC/DC 12 ... 240 V
- Time ranges: 0.05 s ... 300 h
- Width: 22.5 mm

Variants

MK 9906N.82: without connection facility for a remote potentiometer.

MK 9906N.82/500: with connection facility for a remote potentiometer 10 kΩ to adjust the time and additional control input B1 for time interruption / time addition.

Ordering example for variants

MK 9906N .82 _ _ / _ _ /61 AC/DC 12 ... 240 V 0,05 s ... 300 h

Time range
Nominal voltage with UL-approval (Canada / USA)
Variant, if required
Type of terminals without indication:
terminal blocks fixed, with screw terminals
PC (plug in cage clamp): pluggable terminal blocks with cage clamp terminals
PS (plug in screw): pluggable terminal blocks with screw terminals
Contacts
Type

Accessories


AD 3:

External potentiometer 10 kΩ
Article number: 0028962



The external potentiometer is used for remote setting of the time delay. The internal potentiometer of the timer must be set to min. time delay.

Degree of protection front side:


IP 60

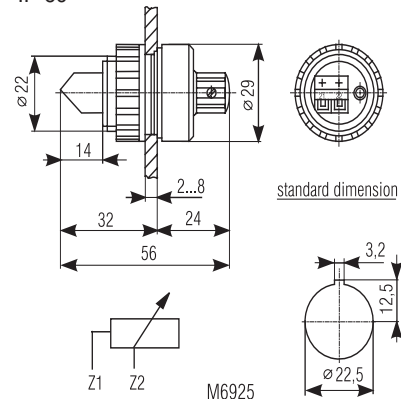

Connection Examples

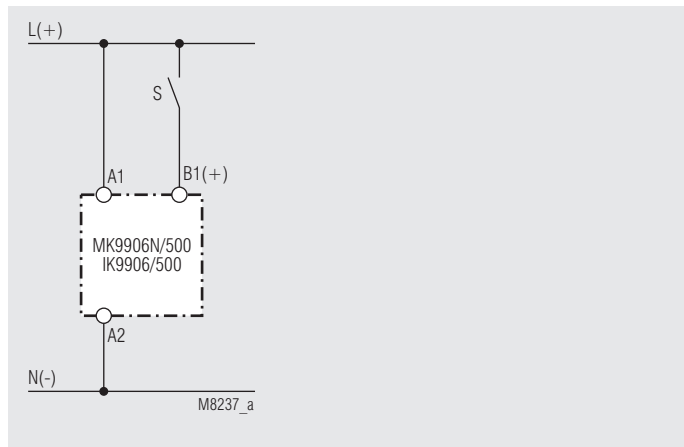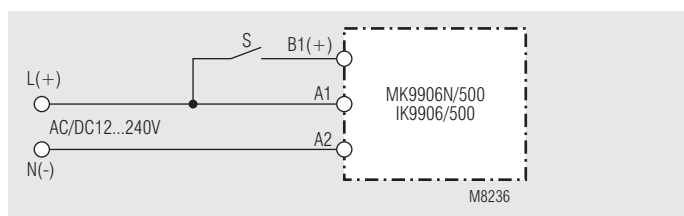

Control with parallel connected load

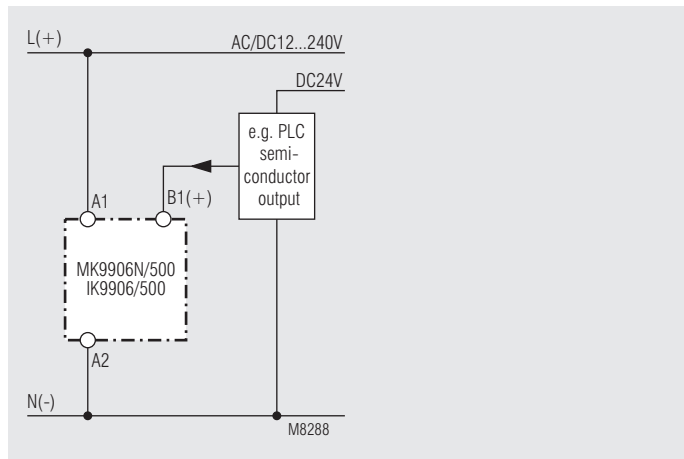

Connection with 2 different control voltages