

# MULTIVERT® 1250A

Size 4a, 690VAC

## NH Vertical Fuse Switch Disconnecter

MULTIVERT® NH vertical fuse switch disconnectors meet all functions of NH fuse switch disconnectors. They are designed for installation on to bus bars in triple pole arrangements.

MULTIVERT® 1250A are for installation on to 185 mm bus bar systems.

MULTIVERT® 1250A are designed for NH fuse-links in accordance with IEC/EN 60269-2, VDE 0636-2, size 4a: 1250A.

MULTIVERT® offer the user the possibility of fast and easy installation as well as a high degree of protection during installation and maintenance.

### Features Benefits

- Installation on to 185 mm bus bar system
- Top or bottom cable terminal connection

### Applications

- Transformer substations
- Switch boards for industrial applications
- Residential and industrial distribution units
- Cable distribution cabinets

### Technical data overview

Volt (VAC)	690 VAC
Amper (A)	1250 A
Size per Standard	4a
Mounting	bus bar system 185 mm
SCCR	Ue = AC 690 V; Ie = 1250 A 50kA
Number of Poles	3
Switchability	3 x single pole




### Standards

IEC/EN 60 947-3  
For NH-fuse links size 4a in accordance with IEC/EN 60 269-2, VDE 0636-2



# MULTIVERT® 1250A

Size 4a, 690VAC

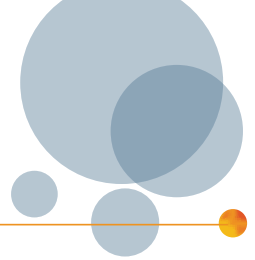

## Product range



1.000.093 1.000.094

### MULTIVERT® 1250 A size 4a 3 x single pole switching

Catalog number	Reference number	Cable termination components	Design	Weight kg <sup>1)</sup>	Package
1.000.093	A1023270	M16 screw terminal	bottom terminal	16.40	1 piece
1.000.094	B1023271	M16 screw terminal	top terminal	16.40	1 piece


## Technical data in accordance with EN / IEC 60947

	1250 A 3 x single pole switching
Installation mode	bus bar installation
Size	4a
Number of poles/phases	3
Conventional free air thermal current with NH-fuse links $I_{th}$	1250 A
Max. power dissipation of fuse links $P_n$	110 W
Conventional free air thermal current with solid links $I_{th}$	1250 A
Max. power dissipation of solid links $P_n$	42 W
Utilization category to IEC/EN 60947-3 $U_e = AC 500 V; I_e = 1250 A$	AC 22 B
Rated operational voltage $U_e$	690 V
Rated insulation voltage $U_i$	1000 V
Rated impulse withstand voltage $U_{imp}$	8 kV
Rated frequency	50 ... 60 Hz
Degree of protection	IP 20
Degree of pollution	3
Rated duty	uninterrupted duty
Rated short circuit making capacity with solid links $I_{cm}$	68 kA <sub>sw</sub>
Rated short circuit making capacity with fuse links $U_e = AC 690 V; I_e = 1250 A$	50 kA
Rated short circuit withstand current $I_{cw}$	32 kA / 1 s
Power dissipation by $I_{th}$ without NH-fuse links	336 W
Power dissipation by $I_{th}$ 1000 A without solid links	336 W
<b>Cable terminal connection</b>	
Standard cable terminal	M16
for copper bars with max. dimensions	80 x 10 mm

1) weight in kg per piece or set including package


# MULTIVERT® 1250A

Size 4a, 690VAC

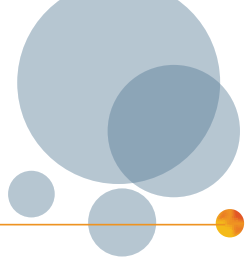

## Dimensions


MULTIVERT® NH-vertical fuse switch disconnecter 1250A (M02004)

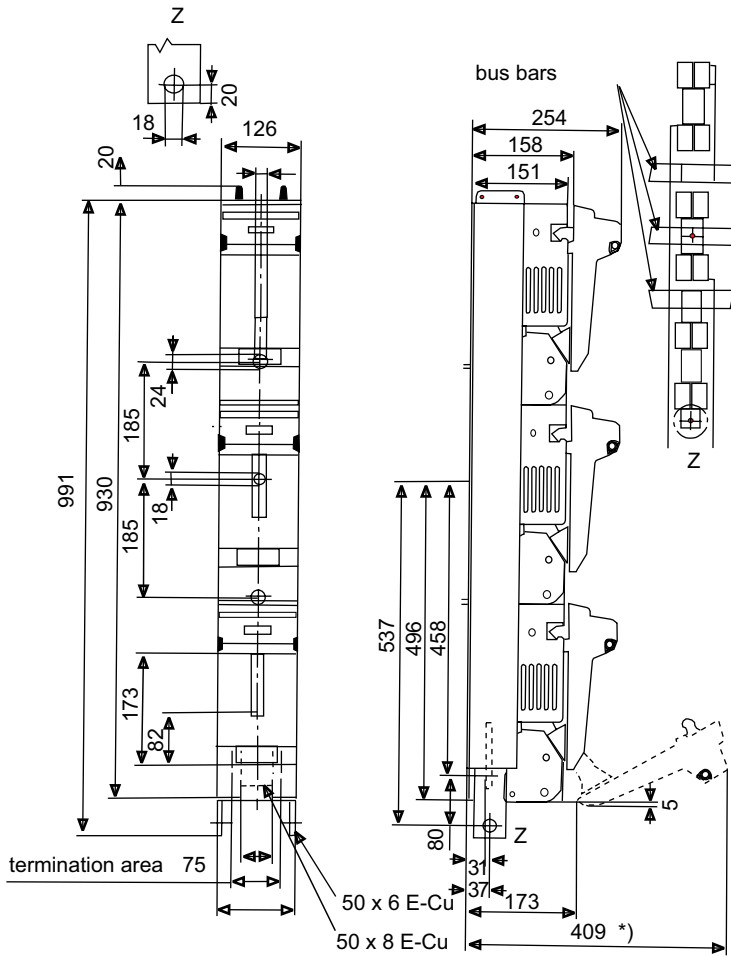

\*) to remove switch door cover 425 mm are required

Dimensions in mm

Cable termination MULTIVERT® 1250A (M02040\_1250)



Dimensions in mm