




LOW FREQUENCY PULSE TRANSFORMERS for voltage step-up







MYRRA Part N°	Ratio P/S	L pri. +/-30%	Current max	Resistance max	Pulse Vsec . t max	Sine Vsec. max	Insulation Voltage P/ S
74640	1 / 5	11 mH	Pri : 0.5 Arms Sec : 0.1 Arms	Pri : 1.0 Ω Sec : 31 Ω	16 V.ms	4 Vrms / 50 Hz 50 Vrms / 5 kHz	1500
74641	1 / 10	11 mH	Pri : 0.4 Arms Sec : 0.04 Arms	Pri : 1.8 Ω Sec : 80 Ω	33 V.ms	8 Vrms / 50 Hz 100 Vrms / 5 kHz	1500

SAFETY :

These products are only composed of UL-V0 approved materials.

74640-74641 Size E19-V

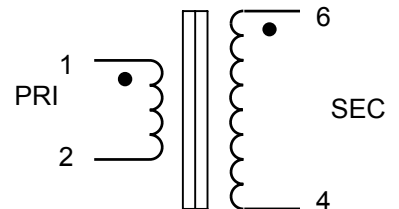

Pins 3 & 5 removed for locating

PCB drill @ Ø 1.1mm

Weight ≈ 14 g