


## Miniature Fuses

Convenience Fuses 5x20  
5T Time Lag  
250VAC from 0.032 to 25A



### Dimensions

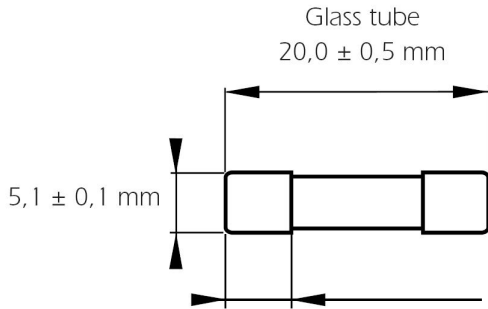

Product weight: 1.2g max.  
Packaging: 10 boxes x 10 fuses.

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)
5x20	MI5T25V0.032	C216639	250	0.032	35
5x20	MI5T25V0.04	P217156	250	0.04	35
5x20	MI5T25V0.05	T217666	250	0.05	35
5x20	MI5T25V0.063	D218181	250	0.063	35
5x20	MI5T25V0.08	R218699	250	0.08	35
5x20	MI5T25V0.1	B216638	250	0.1	35
5x20	MI5T25V0.125	N217155	250	0.125	35
5x20	MI5T25V0.16	S217665	250	0.16	35
5x20	MI5T25V0.2	C218180	250	0.2	35
5x20	MI5T25V0.25	Q218698	250	0.25	35
5x20	MI5T25V0.315	D219216	250	0.315	35
5x20	MI5T25V0.4	E219217	250	0.4	10 x In
5x20	MI5T25V0.5	F219747	250	0.5	10 x In
5x20	MI5T25V0.63	N222192	250	0.63	10 x In
5x20	MI5T25V0.8	G219748	250	0.8	10 x In
5x20	MI5T25V1	J222947	250	1	10 x In
5x20	MI5T25V1.25	S200737	250	1.25	10 x In
5x20	MI5T25V1.6	P222193	250	1.6	10 x In
5x20	MI5T25V2	G201279	250	2	10 x In
5x20	MI5T25V2.5	R201794	250	2.5	10 x In
5x20	MI5T25V3.15	Q211016	250	3.15	10 x In
5x20	MI5T25V4	G211537	250	4	10 x In
5x20	MI5T25V5	M212048	250	5	10 x In
5x20	MI5T25V6.3	E212570	250	6.3	10 x In
5x20	MI5T25V8	Q213086	250	8	10 x In
5x20	MI5T25V10	J213586	250	10	10 x In
5x20	MI5T25V12.5	P214603	250	12.5	10 x In
5x20	MI5T25V16	X215116	250	16	10 x In
5x20	MI5T25V20	Y215623	250	20	10 x In
5x20	MI5T25V25	D226484	250	25	10 x In

## Miniature Fuses

Convenience Fuses 5x20  
5T Time Lag  
250VAC from 0.032 to 25A



### Melting Time Limits

Nominal current	210% x I <sub>n</sub>	275% x I <sub>n</sub>	400% x I <sub>n</sub>	1000% x I <sub>n</sub>
From 0.032A to 0.1A	2min maxi	200ms mini 10s maxi	40ms mini 3s maxi	40ms mini 3s maxi
From 0.125A to 20A	2min maxi	600ms mini 10s maxi	150ms mini 3s maxi	20ms mini 300ms maxi

### Time Current Curve

