



## Miniature Fuses

Convenience Fuses 6x32  
6T Fast Acting  
250VAC from 0.032 to 20A



### Dimensions

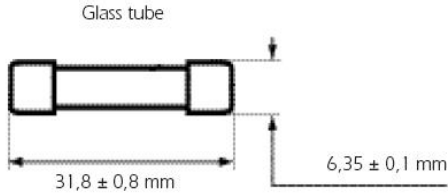


Product weight: 2.2g max.  
Packaging: 10 boxes x 10 fuses.

Size	Catalog Number	Reference Number	Rated Voltage (V)	Nominal Current (A)	Breaking capacity @ Nominal current (A)
6x32	MI6T25V0.032	H216138	250	0.032	35
6x32	MI6T25V0.04	F216642	250	0.04	35
6x32	MI6T25V0.05	S217159	250	0.05	35
6x32	MI6T25V0.063	X217669	250	0.063	35
6x32	MI6T25V0.08	G218184	250	0.08	35
6x32	MI6T25V0.1	M214095	250	0.1	35
6x32	MI6T25V0.125	Q214604	250	0.125	35
6x32	MI6T25V0.16	A215625	250	0.16	35
6x32	MI6T25V0.2	G216137	250	0.2	35
6x32	MI6T25V0.25	E216641	250	0.25	35
6x32	MI6T25V0.315	R217158	250	0.315	35
6x32	MI6T25V0.4	V218702	250	0.4	35
6x32	MI6T25V0.5	W217668	250	0.5	35
6x32	MI6T25V0.63	F218183	250	0.63	35
6x32	MI6T25V0.8	H219220	250	0.8	35
6x32	MI6T25V1	T218701	250	1	35
6x32	MI6T25V1.25	G219219	250	1.25	35
6x32	MI6T25V1.6	K219751	250	1.6	35
6x32	MI6T25V2	J219750	250	2	35
6x32	MI6T25V2.5	R222195	250	2.5	35
6x32	MI6T25V3.15	M222950	250	3.15	35
6x32	MI6T25V4	W200740	250	4	10 x In
6x32	MI6T25V5	K201282	250	5	10 x In
6x32	MI6T25V6.3	Q212051	250	6.3	10 x In
6x32	MI6T25V8	H212573	250	8	10 x In
6x32	MI6T25V10	S213088	250	10	10 x In
6x32	MI6T25V12.5	L213588	250	12.5	10 x In
6x32	MI6T25V16	N214096	250	16	10 x In
6x32	MI6T25V20	R214605	250	20	-

*Fuses without approval.*

## Miniature Fuses

Convenience Fuses 6x32  
6T Fast Acting  
250VAC from 0.032 to 20A



### Melting Time Limits

Nominal current	210% x I <sub>n</sub>	275% x I <sub>n</sub>	400% x I <sub>n</sub>	1000% x I <sub>n</sub>
From 32mA to 100mA	2min maxi	0.2ms mini 10ms maxi	40ms mini 1s maxi	5s min 150ms maxi
From 125mA to 20A	30min maxi	0.40ms mini 20ms maxi	150ms mini 2s maxi	20s min 200ms maxi

### Time Current Curve

