




DC5-2200 DC CONVERTER



DC5-2200 is a DC-DC converter used to supply 5 Vdc to the DS2200 scanner from a source between 4 and 30 Vdc.

All connections should be made with power OFF.


Be sure to supply the device using a Class 2 Power Unit conforming to the EN 60950 electrical safety standard.

The DC5 can be supplied by a Direct Plug-in Power unit through the **jack connector** on the side, or directly from the **host connector** between pin 13 (+V) and pin 25 (GND).

If the jack connector is used, pin 13 to the host is automatically disconnected.

All other signals are directly passed through except pin 9 which is not connected.

The maximum load is 450 mA at 5 Vdc.

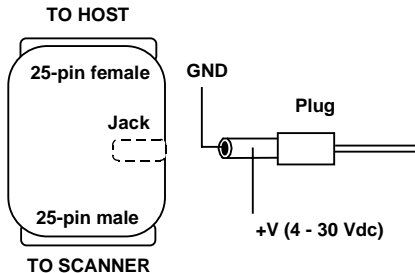

Power supplied using the jack connector

821000270