

MULTIFIX® 60 Terminal Clamp Module

Components for 60mm Systems

MULTIFIX® 60 is a system for energy distribution comprising a variety of modular combinable components. The energy distribution is carried out via copper bus bars in a 60 mm bus bar system up to 630 A, 400 V AC, 500 V AC, 690 V AC, 45–62 Hz. Short circuit withstand tested to VDE 0660 part 500 and IEC 60439-1.

MULTIFIX® 60 is suitable for triple pole, quadruple pole and quintuple pole applications.

The components of the MULTIFIX® 60 system are mounted directly without drilling. This method offers high flexibility for extension and alteration of existing installations -> reduced installation time.

MULTIFIX® 60 terminal clamp module 630 A, triple pole is used for current incoming and outgoing. It offers the possibility to connect on to other bus bar systems. Terminal clamp modules are available in two designs with cable connection for round and flat terminals. They can be installed on to bus bars with a width of 20, 25 and 30 mm and a thickness of 5 and 10 mm.

Features Benefits

- For bus bars with width 20, 25 und 30 mm and thickness 5 - 10 mm
- Terminal clamp module for current incoming and outgoing
- Possibility to connect on to other bus bar systems
- Cable termination by frame clamp for round and flat terminals
round terminal 7-300 mm² round solid
flat terminal 11 x 21 x 1 (x2)
- Tightening torque 40 Nm

Applications

- Panel board builders
- Control system engineering
- Industrial plants
- Heating & air conditioning systems

Technical data overview

Volt (VAC)	690 VAC
Ampere Range (A)	2 ... 630 A




Standards

in accordance with IEC/EN 60439-1
and VDE 0660 part 500



MULTIFIX® 60 Terminal Clamp Module

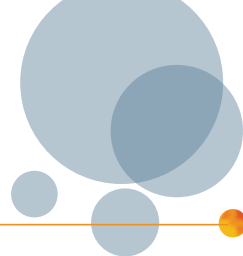

Product range



1.001.047

Terminal clamp module 630 A triple pole


Catalog number	Reference number	Design	Weight kg ¹⁾	Package
1.001.047	V1026416	round terminal 70-300 mm ² round solid	0.25	1
1.001.853	K1026430	flat terminal 11 x 21 x 1 (x 2) round solid	1.50	1

Technical data in accordance with EN / IEC 60947

	Terminal module
Track resistance/comperative tracking index	CTI 600
Fire resistance	UL 94-V0
Temperature resistance	200 °C
Glow wire test	960 °C

Dimensions

Terminal module 630A triple pole for 60mm bus bar system (M02013)

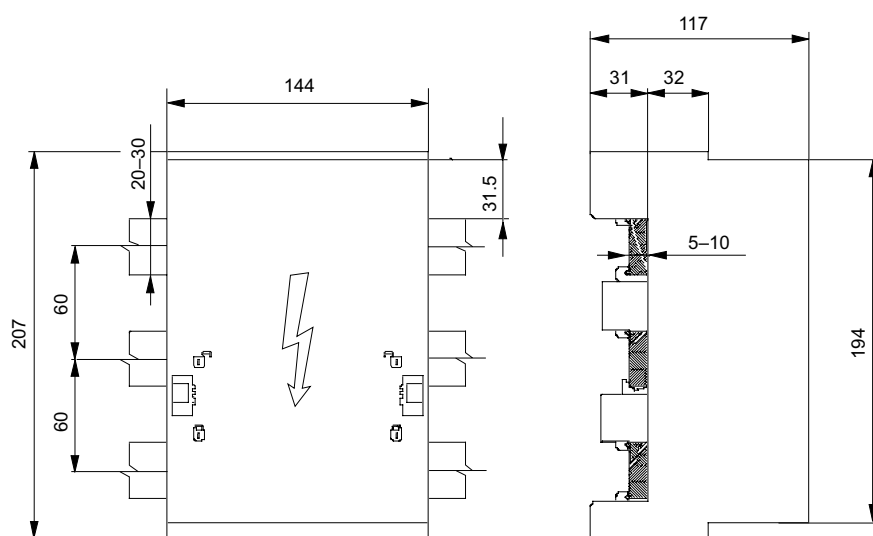

Dimensions in mm

1) weight in kg per piece or set including package