



# PWE Series Slim LED Well Mount Signal Light



Ultra-Slim Signal Lights that offer seamless integration with equipment.



- Slim Profile Wall Mount
- Easy Mounted vertically and horizontally
- Equivalent brightness in every angle
- Steady and flashing lights
- Vibration and moisture resistant
- Chrome is also available as special order



## Ordering Information

**PWE C F - 302 - RYG**

① ② ③ ④ ⑤

### 1. Body Color


	White Ivory (Beige)
<b>C</b>	Chrome Painting

### 2. Light Style

	Steady
<b>F</b>	Steady + Flashing
<b>B</b>	Steady + Buzzer
<b>Z</b>	Steady + Flashing + Buzzer

### 3. Number of Stacks

<b>1</b>	1 Light
<b>2</b>	2 Lights
<b>3</b>	3 Lights




### 4. Power Supply

<b>01</b>	12V AC/DC
<b>02</b>	24V AC/DC
<b>FF</b>	90~240V AC (50/60Hz)

### 5. Lens Colors (Top to bottom)


<b>R</b>	Red
<b>Y</b>	Yellow
<b>G</b>	Green




## Specifications

Power Supply	12V DC	24V DC	90~240V AC	Buzzer
Current Draw	Red LED	54 mA	34 mA	24V DC 90~240V AC 30mA
	Yellow LED	53 mA	37 mA	
	Green LED	40 mA	34 mA	
Size	40.0mm Profile			12V DC
Flashing rate	80 times / minute			200mA
Sound Level	80dB ±5 dB ( at 1m )			
Rating	IP-65 (non-Buzzer style)		IP-52 (with Buzzer style)	

## Dimensions < unit: mm >

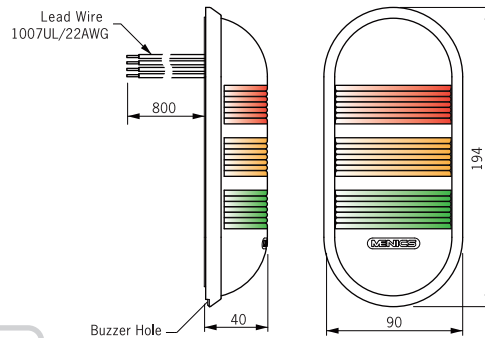


## Mounting Holes




## Wiring Diagram

### 24V AC/DC , 12V AC/DC Steady Lights (with Buzzer)

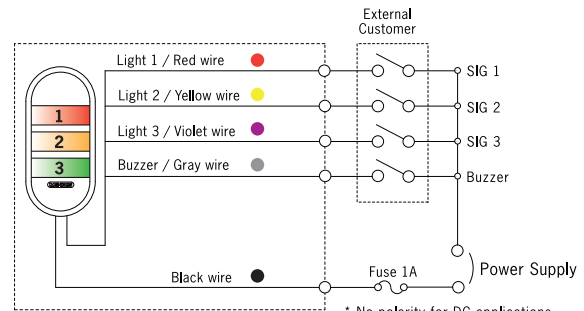

### 90 ~ 240V AC Steady Lights (with Buzzer)

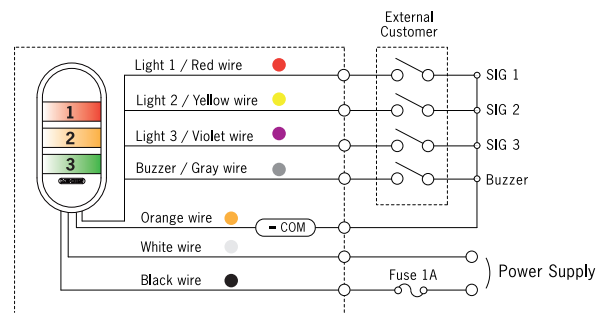

### 24V AC/DC , 12V AC/DC , 90~240V AC Steady & Flashing Lights (with Buzzer)

