




Indicator Panels

IPN/002 - Stop/Go

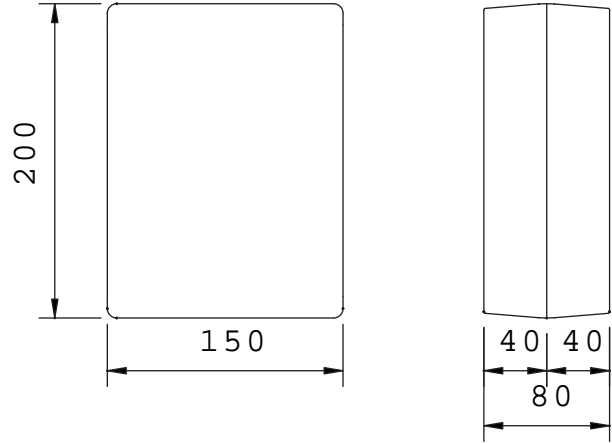

2-way LED Traffic Light ideally suited to a wide variety of applications such as Loading-Bay Signalling, Shutter Door Status, On-Site Traffic Management, Dockside Signalling, Factory Control, etc.

Standard 24Vuc (ac or dc), 115Vac and 230Vac models are available and all units are enclosed in an IP65 UV-stabilised polycarbonate housing (200x150x80mm) for protection against the elements.

Function selection by applying power to relevant terminals with simple three-wire connection for straightforward integration with your system. 24Vac/dc unit maybe connected directly to your existing dock leveler or door control system.

Standard unit features one Red and one Green LED array with clear lens; other colours are available from a choice of Red, Green, Blue or White, available to special quotation/order.

		IPN/UC/24/LED/002/R/G	IPN/AC/115/LED/002/R/G	IPN/AC/230/LED/002/R/G
Supply Voltage		24Vuc	115Vac	230Vac
Minimum Supply Voltage		20Vuc	98Vac	195Vac
Maximum Supply Voltage		27Vuc	132Vac	265Vac
Average Current Draw	Red	166mA	63mA	31mA
	Green	86mA	54mA	25mA
Peak Operating Current	Red	166mA	84mA	43mA
	Green	86mA	69mA	33mA
Nominal power consumption	Red	4.0W	6.6W	6.7W
	Green	2.1W	5.0W	5.0W
Luminous Intensity	Red		205Cd	
	Green		370Cd	
Angle of max rated brilliance			On axis with front face	
Recommended fuse rating			Internal - 1A TD	
IEC protection class			IP65	
Operating Temperature Range			-20 to +45 Degrees C	
Net Product Weight		695g	1000g	1000g