Surface-mounted luminaire SLIM LED - LIQ 36

112544003-00011083



fitted with

work equipment connected load power consumption system of protection class of protection usage luminaire body lamp cover weight (net) mains lead fastening dimension special features Waldmann W

ENGINEER OF LIGHT.


36 x Light-emitting diode light colour daylight white without 22-29 V; DC approx. 21 W IP 67 III external aluminium/plastic, anodised, aluminium coloured anodised acrylic clear approx. 0.8 kg approx. 3.0 m; with free stranded wires screws A=896mm, C=580mm direction of beam +/- 45° adjustable





illuminance

Comment: d=50cm

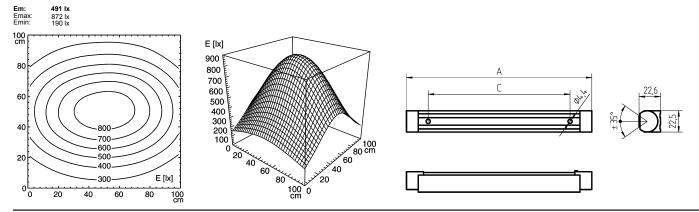

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.