

**light source**

**work equipment**

**connected load**

**Power consumption**

**light distribution**

**System of protection**

**class of protection**

**technology**

**operation**

**luminaire body**

**weight (net)**

**mains supply**

**Fastening**

**dimension**

**light output**

**outside diameter**

**side part**

2 x regular fluorescent lamp T16 54W/840 G5  
 colour temperature neutral white  
 Energy efficiency category A  
 electronic ballast  
 Energy efficiency index (EEI): A2 BAT  
 220-240 V; 50/60 Hz  
 approx. 118 W  
 direct  
 IP67  
 I  
 switchable  
 external  
 borosilicate glass,  
 approx. 5.8 kg  
 connection box  
 160 BU/3  
 lamp bracket (accessory)  
 A=1744 mm  
 D=1048 mm  
 70 mm  
 C with screwed cable gland




160 BU/3

**illuminance**

Comment: d=100cm

Em: 923 lx  
 Emax: 1427 lx  
 Emin: 409 lx

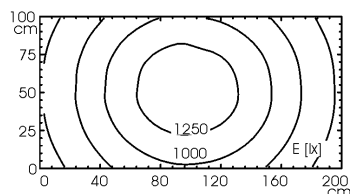

**luminous intensity**

