



light source

- work equipment**
- connected load**
- Power consumption**
- luminous flux**
- luminous efficacy**
- colour temperature**
- color rendering index (CRI)**
- chromaticity tolerance LED**
- glare control**
- System of protection**
- class of protection**
- operation**
- luminaire body**

- lamp cover**
- tubular sections**

- balance of articulation joints**
- weight (net)**
- mains lead**

Fastening

LED
 Energy efficiency category A/A+/A+++
 electronic plug-in transformer
 100-240 V; 50/60 Hz
 approx. 14 W
 approx. 650 lm
 approx. 46 lm/W
 neutral white, approx. 4000 K
 >= 80
 4 SDCM
 conical prismatic screen
 IP20
 II
 multi-function switch
 sectional aluminium, anodised, aluminium coloured
 anodised
 acrylic clear
 tubular aluminium section, anodized, aluminium coloured
 anodised
 spring
 approx. 1.5 kg
 approx. 3 m; mains plug
 BS 1363
 CEE 7/XVI
 NEMA 5-15P
 screw-down flange, table clamp (accessory), wall bracket (accessory)



BS 1363




CEE 7/XVI



NEMA 5-15P

illuminance

distance: 50 cm
 Em: 563 lx
 Emax: 1569 lx
 Emin: 83 lx

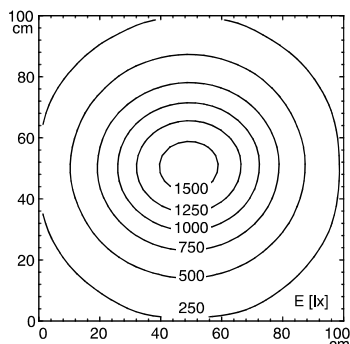

luminous intensity

