

112995000-00555469



light source

work equipment

connected load

Power consumption

light distribution

glare control

System of protection

class of protection

technology

operation

luminaire body

lamp cover

mains supply

Fastening

dimension

1 x regular fluorescent lamp T16 24W/865 G5

colour temperature daylight white

Energy efficiency category A

electronic ballast

Energy efficiency index (EEI): A3

24 V; DC

approx. 24 W

direct

conical prismatic screen

IP68-1m/ IPX9 nach DIN EN 6052

I

switchable

external

sectional aluminium, anodised,

glass screen

built-in plug

0942 046GM

screws

660




0942 046GM

illuminance

Comment: d=100cm

Em: 363 lx
E_{max}: 466 lx
E_{min}: 241 lx

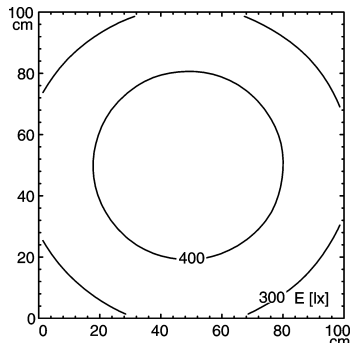

luminous intensity

