

112996000-00555484



**light source**

**work equipment**

**connected load**

**Power consumption**

**light distribution**

**glare control**

**System of protection**

**class of protection**

**technology**

**operation**

**luminaire body**

**lamp cover**

**mains supply**

**design**

**Fastening**

**dimension**

1 x regular fluorescent lamp T16 39W/865 G5

colour temperature daylight white

Energy efficiency category A

electronic ballast

Energy efficiency index (EEI): A3

24 V; DC

approx. 39 W

direct

conical prismatic screen

IP68-1m / IPX9 nach DIN EN 605

I

switchable

external

sectional aluminium, anodised,

glass screen

built-in plug

0942 046GM

mounted version

screws

960




0942 046GM

**illuminance**

Comment: d=100cm

Em: 1096 lx  
E<sub>max</sub>: 1395 lx  
E<sub>min</sub>: 723 lx

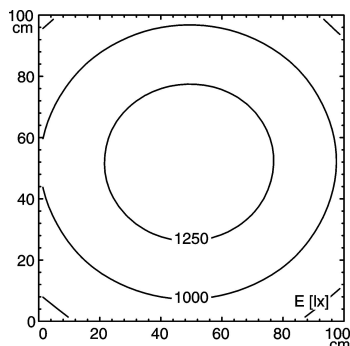

**luminous intensity**

