

113004000-00555561



light source

work equipment

- connected load**
- Power consumption**
- light distribution**
- glare control**
- System of protection**
- class of protection**
- technology**
- operation**
- luminaire body**
- lamp cover**
- mains supply**

**Fastening
dimension**

2 x regular fluorescent lamp T16 39W/865 G5
 colour temperature daylight white
 Energy efficiency category A
 electronic ballast
 Energy efficiency index (EEI): A2
 100-250 V; 50/60 Hz
 approx. 78 W
 direct
 conical prismatic screen
 IP68-1m / IPX9
 I
 switchable
 external
 sectional aluminium, anodised,
 glass screen
 built-in plug
 0942 046GM
 screws
 960




0942 046GM

illuminance

Comment: d=100cm

Em: 1096 lx
 Emax: 1395 lx
 Emin: 723 lx

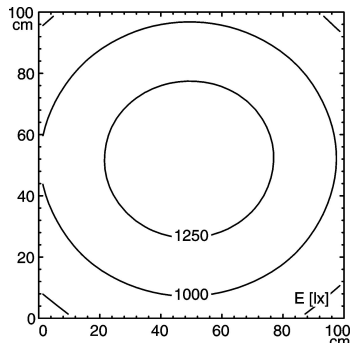

luminous intensity

