## 113046000-00580696



work equipment

light source

connected load Power consumption luminous flux luminous efficacy light distribution colour temperature color rendering index (CRI) System of protection class of protection technology operation luminaire body lamp cover weight (net) mains supply

design Fastening dimension special features ENGINEER OF LIGHT.

Waldmann

W

LED Energy efficiency category A/A+/A++ without 18-30 V; DC approx. 5 W approx. 500 lm approx. 100 lm/W direct neutral white, approx. 5000 K >= 80 IP67 Ш switchable external aluminium, anodised, aluminium coloured anodised screen, clear approx. 1.3 kg built-in plug Serie\_763 mounted version L-angle, clamp A=370 mm


through-wired, Eco equipment

Ø

Serie\_763

## illuminance

## luminous intensity

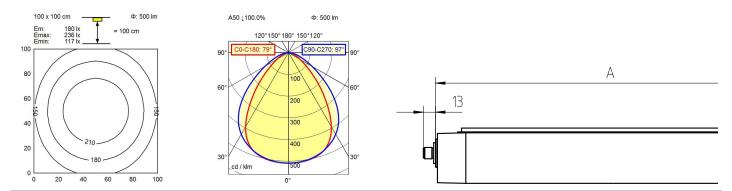

Errors and technical changes excepted. Images can vary from original. Photometric and electrical data may vary due to component tolerances.