

113478000-00800919






light source	LED
work equipment	Energy efficiency category A/A+/A++
connected load	without
Power consumption	20-28V; DC
luminous flux	approx. 43 W
luminous efficacy	approx. 4500 lm
light distribution	approx. 104 lm/W
colour temperature	direct, wide-angled beam
color rendering index (CRI)	neutral white, approx. 5000 K
System of protection	>= 80
class of protection	IP67
technology	III
operation	switchable
luminaire body	external
lamp cover	aluminium, anodised, aluminium coloured anodised
mains supply	screen, clear
	built-in plug
	RSFM 4/0;05 P25-1
design	mounted version
Fastening	L-angle, clamp
dimension	A=1540 mm
special features	angle of illumination 90°, Suitable for higher ambient temperatures



RSFM 4/0;05 P25-1

illuminance

luminous intensity

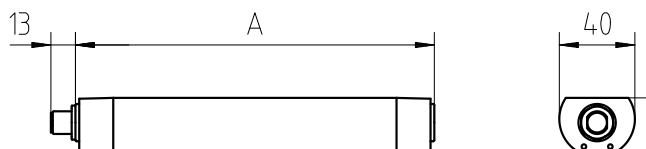

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.