


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patents, proprietary, designs, sale, manufacturing and reproduction rights thereto.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1090	11/13/00	M. A.

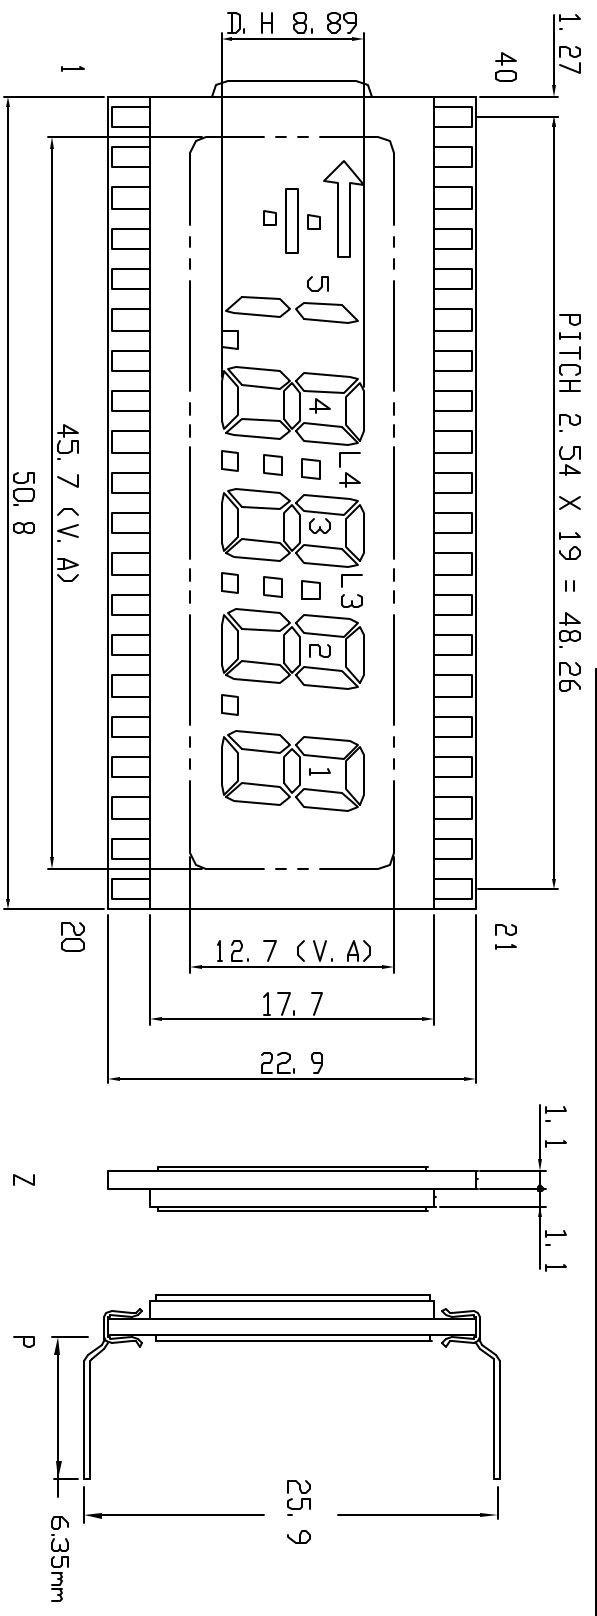


Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	CDM	11	3c	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	5bc	13	2e	23	1g	33	L4
4	5DP	14	2d	24	2b	34	4b
5	4e	15	2c	25	2a	35	4a
6	4d	16	2DP	26	2f	36	4f
7	4c	17	1e	27	2g	37	4g
8	4DP	18	1d	28	L3	38	4c
9	3e	19	1c	29	3b	39	1
10	3d	20	1b	30	3a	40	CDM

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C

Ordering Information

DG-200906-XZ-W	ZEBRA TYPE	DG-200906-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add '-W' for Wide Temp.			



Unless otherwise specified: Dimensions are mm Tolerances are:		APPROVALS	DATE
X = ± 3		DRAWN	
X = ± 0.5			
XX = ± 0.05		CHECKED	
CAGE CODE #DW552		ISSUED	
DENSITRON TECHNOLOGIES PLC.		TITLE	
LCD SEGMENTED GLASS		DWG. NO. DG-200906	
SHEET 1 OF 1			