


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, trade, sale, manufacturing and reproduction rights thereto.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1090	11/13/00	M. A.

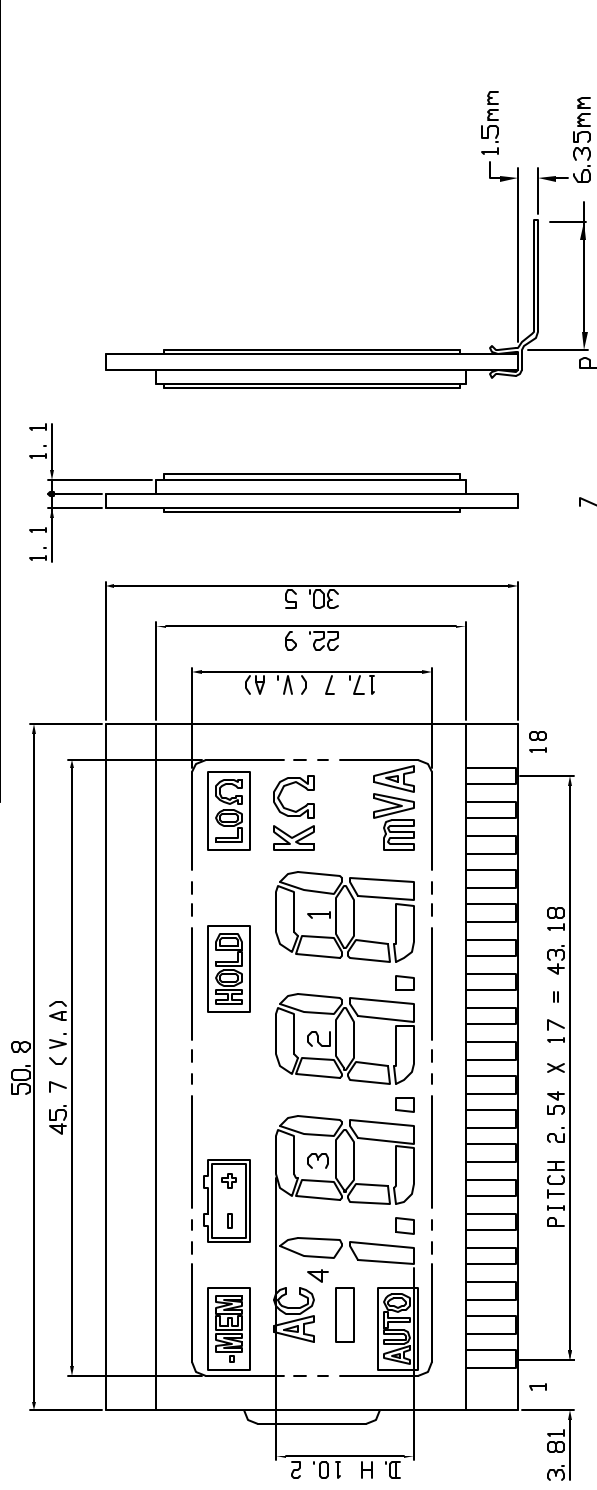

PINOUT:


Pin No.	COM1	COM2	COM3	Pin No.	COM1	COM2	COM3
1	S3	-MEM	N/C	10	1f	1e	NC
2	AC	-	AUTO	11	1a	1g	1d
3	4b	4c	4DP	12	1b	1c	NC
4	3f	3e	NC	13	HOLD	K	m
5	3a	3g	3d	14	NC	■	V
6	3b	3c	3DP	15	NC	LO	A
7	2f	2e	NC	16			COM3
8	2a	2g	2d	17		COM2	
9	2b	2c	2DP	18	COM1		

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	1/3
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-3149-XZ-W	ZEBRA TYPE	DG-3149-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transmissive Polarizer, or 'F' for Transmissive Polarizer, add -V for Wide Temp.			



APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

Unless otherwise specified:
 Dimensions are mm
 Tolerances are:
 X = ± 3
 .X = ± 0.5
 .XX = ± 0.05
 CAGE CODE #DVSSE

DENSITRON TECHNOLOGIES PLC.	
TITLE	LCD SEGMENTED GLASS
DWG. NO.	DG-3149
SHEET 1 OF 1	