


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patents, proprietary, designuse, sale, manufacturing and reproduction rights therein.

REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1090	11/13/00	M. A.

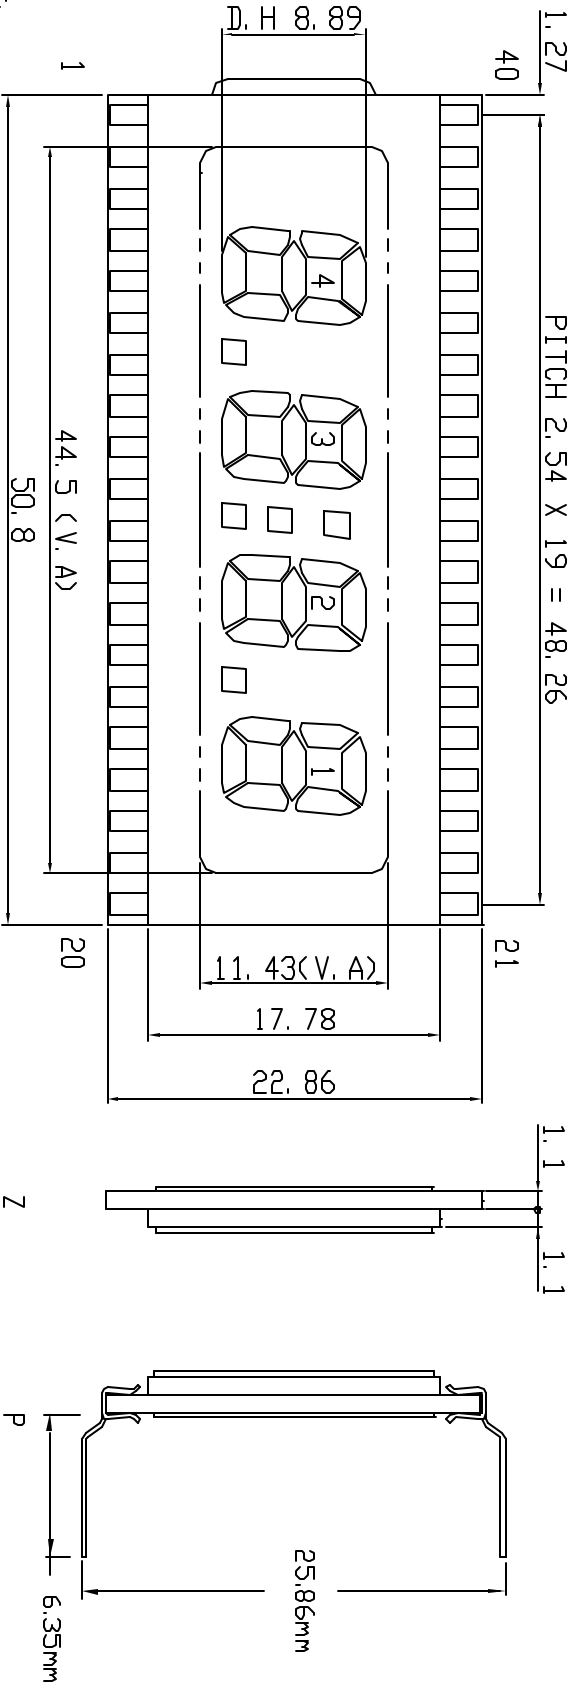

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	CDM	11	3c	21	1a	31	3f
2	NC	12	2DP	22	1f	32	3g
3	NC	13	2e	23	1g	33	NC
4	NC	14	2d	24	2b	34	4b
5	4e	15	2c	25	2a	35	4a
6	4d	16	1DP	26	2f	36	4f
7	4c	17	1e	27	2g	37	4g
8	3DP	18	1d	28	1	38	NC
9	3e	19	1c	29	3b	39	NC
10	3d	20	1b	30	3a	40	CDM


Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C

Ordering Information

DG-200907-XZ	ZEBRA TYPE	DG-200907-XP	PIN TYPE
Replace the "X" in the above part number with "R" for Reflective polarizer, "B" for Transflective polarizer, or "F" for Transmissive polarizer.			

Unless otherwise specified, dimensions are in mm. Tolerances are:



X = ± 0.3  
 X = ± 0.5  
 XX = ± 0.05  
 CAGE CODE #DVSS2

APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

DENSITRON TECHNOLOGIES PLC.	
TITLE LCD SEGMENTED GLASS	
DWG. NO. DG-200907	SHEET 1 OF 1