



Technical Data	
<b>Input Circuit</b>	
<b>Nominal voltage <math>U_N</math></b> L1 / L2 / L3:	3 AC 230, 400, 690 V (other voltages on request)
<b>Setting range:</b>	0.7 ... 1.3 $U_N$
<b>Overload capacity of <math>U_N</math>:</b>	1.5 $U_N$ / 2 $U_N$ (10 s) max. 1 000 V
<b>Nominal frequency of <math>U_N</math>:</b>	50 / 60 Hz
<b>Frequency range of <math>U_N</math>:</b>	45 ... 65 Hz
<b>Accuracy:</b>	$\leq \pm 0.5\%$ of $U_N$
<b>Power consumption with <math>U_N</math>:</b>	L1 approx. 0.5 mA L2 approx. 0.5 mA L3 approx. 0.8 mA
<b>Hysteresis:</b>	$\leq 5\% \times U_A$ ( $U_A$ = response value)
<b>Asymmetry detection</b> Voltage:	$U_A \pm 8 \dots 20\%$
<b>Fault angle:</b>	approx. $120^\circ \pm 15^\circ$
<b>Temperature influence:</b>	$\leq 0.08\% / K$


Auxiliary Circuit	
<b>Auxiliary voltage <math>U_H</math></b> A1 / A2:	AC 110, 230, 400 V AC/DC 24 ... 60 V, AC/DC 110 ... 230 V (other voltages on request)
<b>Voltage range of <math>U_H</math>:</b>	0.8 ... 1.1 $U_H$
<b>Nominal frequency of <math>U_H</math>:</b>	50 / 60 Hz
<b>Frequency range of <math>U_H</math>:</b>	45 ... 500 Hz
<b>Nominal consumption:</b>	2.4 VA

Output Circuit	
<b>Contacts</b> BD 9080.12:	2 changeover contacts
<b>Response-/Release time:</b>	approx. 900 / 150 ms
<b>Time delay <math>t_v</math>:</b>	0.1 ... 5 s
<b>Thermal current <math>I_{th}</math>:</b>	6 A (see continuous current limit curve)
<b>Switching capacity</b> to AC 15	
NO contact:	2 A / AC 230 V IEC/EN 60 947-5-1
NC contact:	1 A / AC 230 V IEC/EN 60 947-5-1
to DC 13	
NO contact:	1 A / DC 24 V IEC/EN 60 947-5-1
NC contact:	1 A / DC 24 V IEC/EN 60 947-5-1
<b>Electrical life:</b> to AC 15 at 1 A, AC 230 V:	IEC/EN 60 947-5-1
NO contact:	2.5 x 10 <sup>5</sup> switching cycles
<b>Permissible switching frequency:</b>	20 switching cycles / s
<b>Short circuit strength</b> max. fuse rating:	4 A gL IEC/EN 60 947-5-1
<b>Mechanical life:</b>	$\geq 50 \times 10^6$ switching cycles


General Data	
<b>Operating mode:</b>	Continuous operation
<b>Temperature range:</b>	- 20 ... + 60°C
<b>Clearance and creepage distances</b> rated impuls voltage / pollution degree	
auxiliary voltage:	6 kV / 2 IEC 60 664-1
Contact / contact:	4 kV / 2 IEC 60 664-1
<b>EMC</b>	
Electrostatic discharge:	8 kV (air) IEC/EN 61 000-4-2
HF irradiation:	10 V/m IEC/EN 61 000-4-3
Fast transients:	2 kV IEC/EN 61 000-4-4
Surge voltages between wires for power supply:	1 kV IEC/EN 61 000-4-5
between wire and ground:	2 kV IEC/EN 61 000-4-5
Interference suppression:	Limit value class B EN 55 011
<b>Degree of protection</b>	
Housing:	IP 40 IEC/EN 60 529
Terminals:	IP 20 IEC/EN 60 529
<b>Housing:</b>	Thermoplastic with V0 behaviour according to UL subject 94

Technical Data	
<b>Vibration resistance:</b>	Amplitude 0.35 mm IEC/EN 60 068-2-6 frequency 10 ... 55 Hz,
<b>Climate resistance:</b>	20 / 060 / 04 IEC/EN 60 068-1
<b>Wire connection:</b>	2 x 2.5 mm <sup>2</sup> solid DIN 46 228-1/-2/-3/-4 or 2 x 1.5 mm <sup>2</sup> stranded wire with sleeve DIN 46 228-1/-2/-3/-4
<b>Wire fixing:</b>	Flat terminals with self-lifting clamping piece IEC/EN 60 999-1
<b>Mounting:</b>	DIN rail IEC/EN 60 715
<b>Weight:</b>	325 g
<b>Dimensions</b>	
<b>Width x height x depth:</b>	45 x 74 x 133 mm

UL-Data	
<b>Switching capacity:</b>	Pilot duty B300

 Technical data that is not stated in the UL-Data, can be found in the technical data section.

CCC-Data	
<b>Thermal current <math>I_{th}</math>:</b>	5 A

 Technical data that is not stated in the CCC-Data, can be found in the technical data section.

Standard Type	
BD 9080.12 3 AC 400 V AC 230 V	
Article number:	0045382 stock item
• Output:	2 changeover contacts
• Nominal voltage $U_N$ :	3 AC 400 V
• Auxiliary voltage $U_H$ :	AC 230 V
• Closed circuit operation	
• Width:	45 mm

## Variants


BD 9080.12/61:  
 BD 9080:  
 BD 9080.12/001:  
 BD 9080.12/020:  
 BD 9080.12/200:

with UL-approval on request  
 with CCC-approval on request  
 open circuit operation  
 output relay  
 indicates only under- and overvoltage  
 with extended temperature range of  
 - 40 ... + 70 °C



### Remark

At an ambient temperature of + 70°C the device has to be mounted with 2 cm space to the neighbour units and the necessary air circulation must be provided.  
 The contact current must not be more then 2 A.  
 The life of the product may be reduced by the higher ambient temperature!


### Ordering example for variant

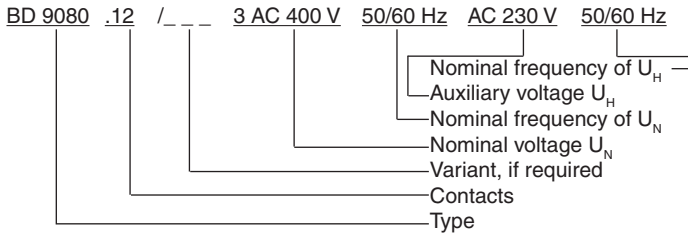

## Connection Examples

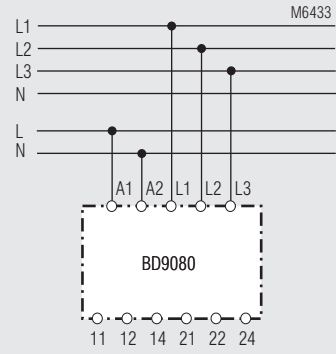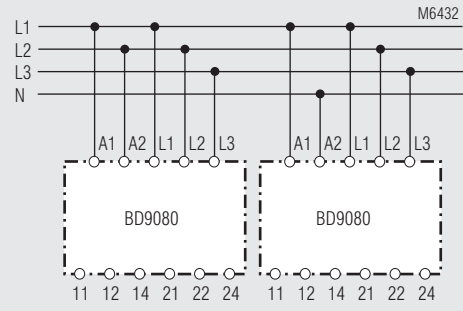

## Characteristic

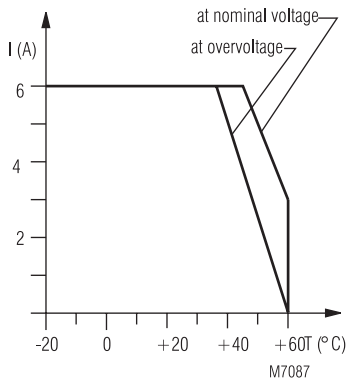

Continuous current limit curve

