


## VARIMETER

### Over- and Undercurrent Relay

IL 9277, IP 9277, SL 9277, SP 9277

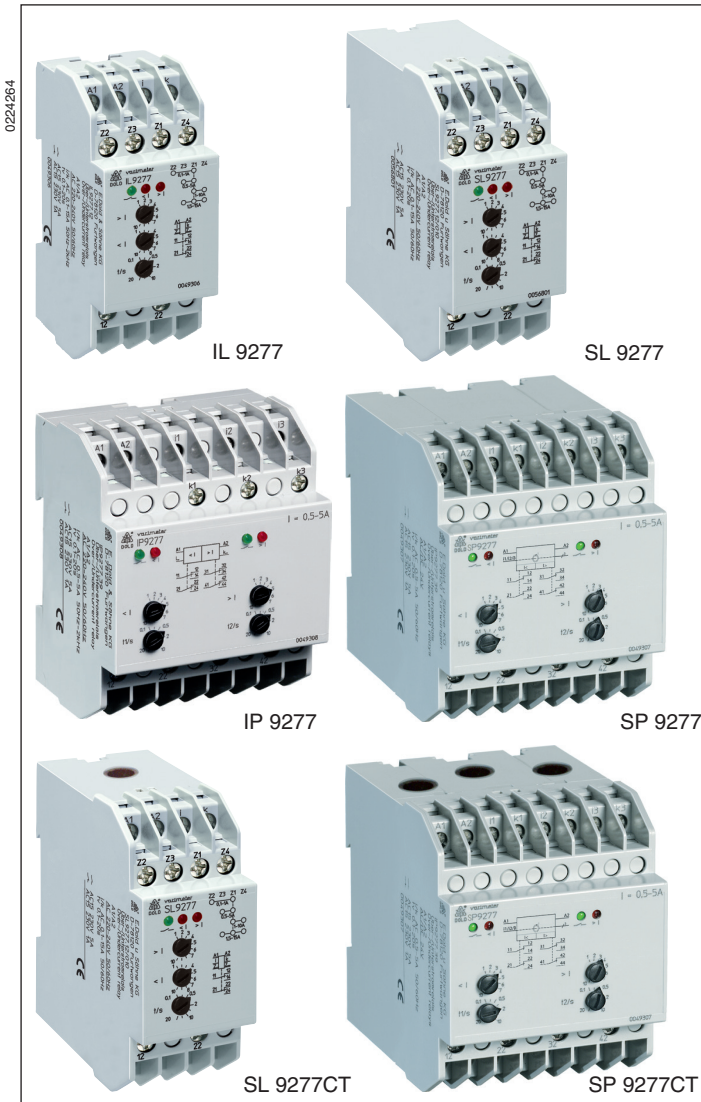

- According to IEC/EN 60 255, DIN VDE 0435-303
- IP 9277, SP 9277, SP 9277CT: 3-phase  
IL 9277, SL 9277, SL 9277CT: single phase
- Detects over- and undercurrent
- Measuring ranges from 0.1 ... 15 A
- With built in current transformer for 0.5 ... 100 A
- IL 9277, SL 9277 with 4 programmable ranges
- Settable  $0.1 \dots 1 I_N$
- Separate setting for over- and undercurrent
- Fixed hysteresis approx. 4 %
- Settable time delay
- IP 9277, SP 9277 with separate settable time delay for over- and undercurrent
- De-energized on trip
- LED indicators for over-, under- and normal current
- Auxiliary supply and measuring input galvanic separated
- IL 9277, SL 9277 with one output relay for over- and undercurrent
- IP 9277, SP 9277 with separate output relays for over- and undercurrent
- Optionally energized on trip
- **Devices available in 2 enclosure versions:**  
**I-model, e.g. IL \_ \_ \_ \_ , depth 61 mm**  
**with terminals at the bottom for installations systems and industrial distribution systems according to DIN 43 880**  
**S-model, e.g. SL \_ \_ \_ \_ , depth 100 mm**  
**with terminals at the top for cabinets with mounting plate and cable duct**
- Width IL 9277, SL 9277, SL 9277CT: 35 mm  
IP 9277, SP 9277, SP 9277CT: 70 mm

#### Approvals and Markings



\*) only IL 9277 and IP 9277





#### Applications

Over- and undercurrent detection in single phase or 3-phase voltage systems

#### Indicators

LED green:	current within limits
LED red $I_{max}$ :	overcurrent
LED red $I_{min}$ :	undercurrent

## Circuit Diagram

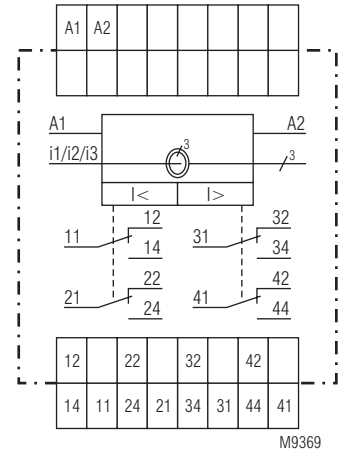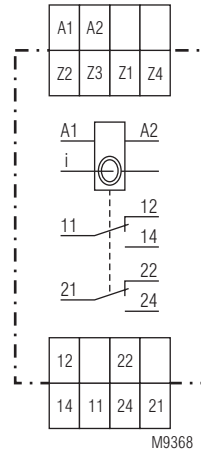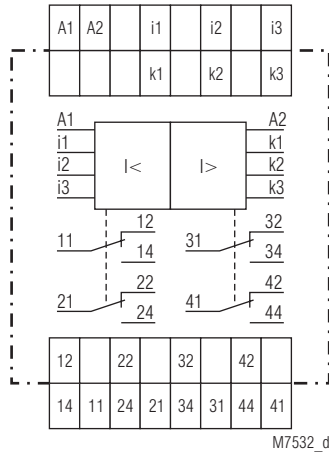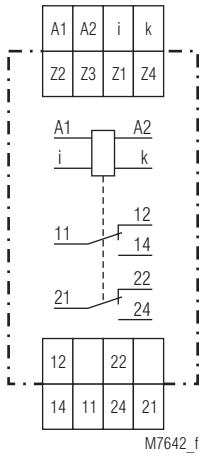


IL 9277.12, SL 9277.12


IP 9277.39, SP 9277.39





SL 9277.12CT

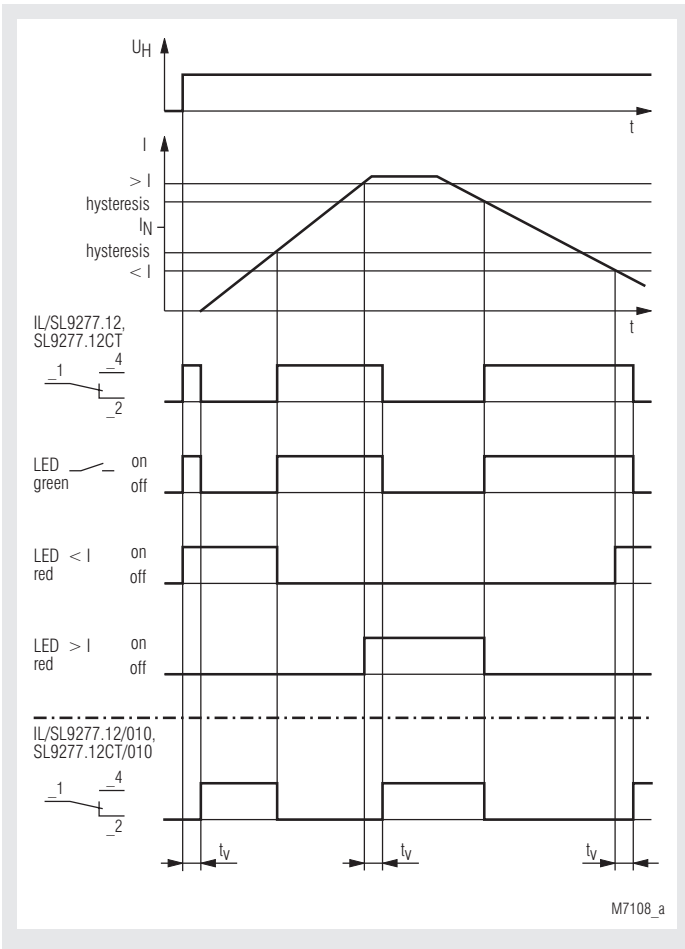SP 9277.39CT
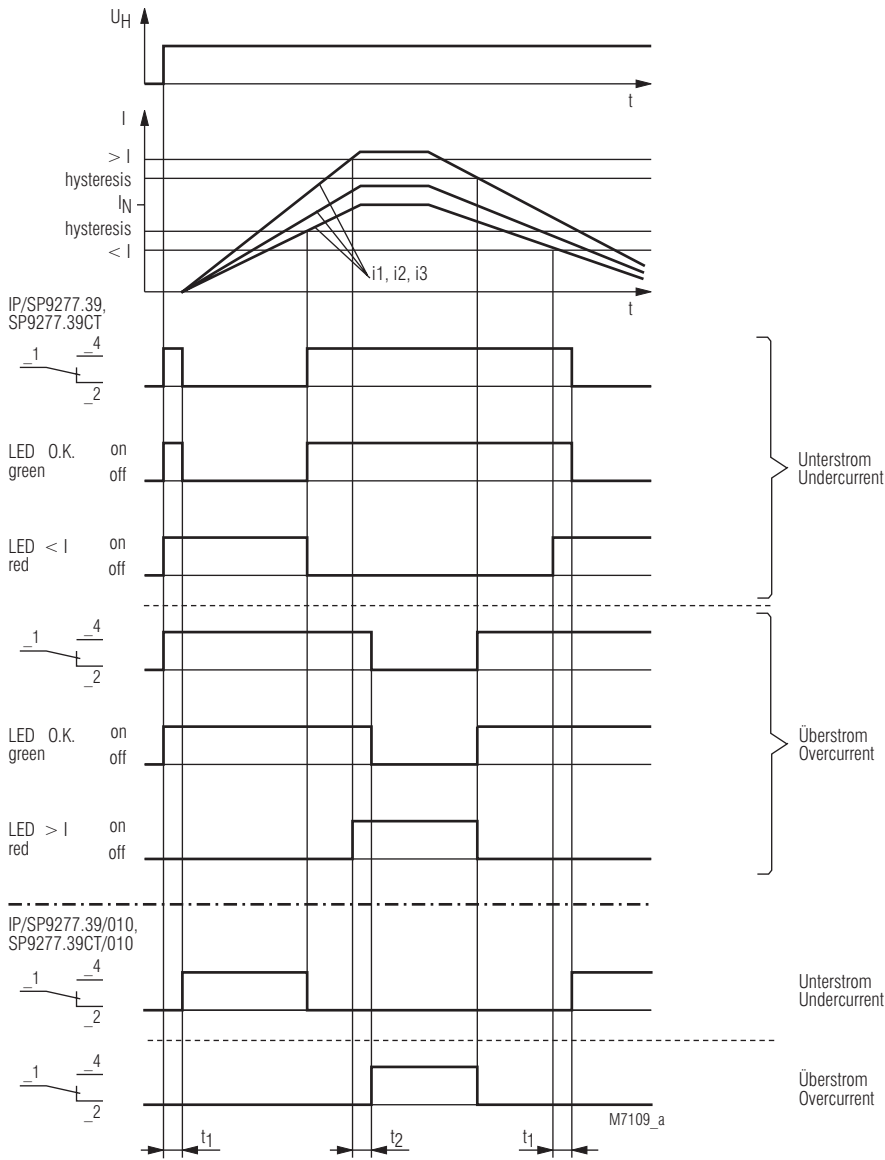
## Function Diagram IL 9277, SL 9277, SL 9277CT





Type				
	<b>IL 9277</b>	<b>SL 9277CT</b>	<b>IP 9277</b>	<b>SP 9277CT</b>
Depth 61 mm	IL 9277.12		IP 9277.39	
Depth 100 mm	SL 9277.12	SL 9277.12CT	SP 9277.39	SP 9277.39CT
Width	35 mm	35 mm	70 mm	70 mm
Measuring input	single-phase	single-phase	3-phase	3-phase
Measuring range	0.1 ... 15 A settable with switch range / bridge	0.5 ... 100 A settable with bridges: range / bridge	1 Meas. range per unit	1 Meas. range per unit
Nominal frequency 50 ... 400 Hz	0.1 ... 1 A / Z1-Z2 0.5 ... 5 A / Z1-Z3 1 ... 10 A / Z1-Z4 1.5 ... 15 A / Z3-Z1-Z4  0.01 ... 1.5 A programmable with bridges: range / bridge 0.01 ... 0.1 A / Z1-Z3 0.05 ... 0.5 A / Z1-Z2 0.1 ... 1 A / Z1-Z4 0.15 ... 1.5 A / Z2-Z1-Z4	0.5 ... 5 A / Z1-/Z2 2.5 ... 25 A / Z1-Z3 7.5 ... 75 A / Z1-Z4 10 ... 100 A / Z3-Z1-Z4	0.1 ... 1 A 0.5 ... 5 A 1 ... 10 A 1.5 ... 15 A	0.5 ... 5 A 2.5 ... 25 A 5 ... 50 A 7.5 ... 75 A 10 ... 100 A
Continuous current/ Max. ambient temperature	20 A / 50 °C 15 A / 60 °C	limited only by diameter of cable 25 mm <sup>2</sup>	3 x 15 A / 50 °C 3 x 20 A / 45 °C	limited only by diameter of cable 25 mm <sup>2</sup>
Wire current path Solid Stranded ferrule	2 x 2.5 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup>	CT-diameter = 10 mm 25 mm <sup>2</sup>	2 x 2.5 mm <sup>2</sup> 2 x 1.5 mm <sup>2</sup>	CT-diameter = 10 mm 25 mm <sup>2</sup>
Contacts	2 C/O contacts	2 C/O contacts	2 x 2 C/O contacts *)	2 x 2 C/O contacts *)
Weight:	IL 9277: 125 g SL 9277: 150 g	approx. 230 g	IP 9277: 200 g SP 9277: 250 g	a<pprox. 470 g

\*) 2 changeover contacts for overcurrent, 2 changeover contacts for undercurrent

## Technical Data

**Max. overload:** see table  
**Temperature influence:** ≤ 0.05 % / K  
**Reaction time:** see characteristic switching delay

### Setting Ranges

**Response value:** infinite variable within measuring range  
**Hysteresis:** approx. 4 % of setting value, fixed  
**Repeat accuracy:** ≤ ± 1 %  
**Switching delay:** 0.1 ... 20 sec settable

### Auxiliary Circuit

#### Auxiliary voltage $U_H$

IL 9277, SL 9277, SL 9277CT: AC/DC 24 V  
 AC 115 ... 127 V, AC 220 ... 240 V,  
 AC 400 ... 440 V  
 IP 9277, SP 9277, SP 9277CT: AC/DC 24 V  
 AC 115, 127 V  
 AC 220 ... 240 V, AC 400 ... 440 V

#### Voltage range

at AC: 0.8 ... 1.1  $U_H$   
 at DC: 0.8 ... 1.25  $U_H$

#### Nominal consumption

IL 9277, SL 9277, SL 9277CT  
 at AC 230 V: 3.2 VA  
 at DC 24 V: 0.8 W  
 IP 9277, SP 9277, SP 9277CT  
 at AC 230 V: 7.2 VA  
 at DC 24 V: 1 W

**Nominal frequency:** 50 / 60 Hz

**Frequency range:** ± 5 %

### Output

#### Contacts

IL 9277.12, SL 9277.12,  
 SL 9277.12CT: 2 changeover contact  
 IP 9277.39, SP 9277.39,  
 SP 9277.39CT: 2 x 2 changeover contact  
**Thermal current  $I_{th}$ :** 5 A

#### Switching capacity

to AC 15

NO contact: 5 A / AC 230 V IEC/EN 60 947-5-1  
 NC contact: 1 A / AC 230 V IEC/EN 60 947-5-1

#### Electrical life

to AC 15 at 2 A, AC 230 V

NO contact: 2 x 10<sup>5</sup> switch. cycles IEC/EN 60 947-5-1

#### Short-circuit strength

**max. fuse rating:** 4 A gL IEC/EN 60 947-5-1

**Mechanical life:** > 50 x 10<sup>6</sup> switching cycles

### General Data

**Operating mode:** Continuous operation

**Temperature range:** - 20 ... + 60°C

#### Clearance and creepage distances

rated rated impulse voltage voltage/

pollution degree:

IEC 60 664-1

	IP/SP-devices	IL/SL-devices
supply - contacts	4 kV/2	4 kV/2
supply - Measuring Circuit	6 kV/2	4 kV/2
Measuring Circuit-Measuring Circuit	6 kV/2	-
Measuring Circuit - contacts	6 kV/2	4 kV/2
Measuring Circuit, max. voltage:	3 AC 400/690 V	AC 230 V/400
The contacts are not designed for voltage systems with 400 / 690 V		
contacts, max. voltage:	AC 230/400 V	AC 230/400 V

## Technical Data

### EMC

Electrostatic discharge: 8 kV (air) IEC/EN 61 000-4-2  
 HF irradiation: 10 V / m IEC/EN 61 000-4-3  
 Fast transients: 4 kV IEC/EN 61 000-4-4

### Surge voltages

between

wires for power supply: 1 kV IEC/EN 61 000-4-5  
 between wire and ground: 2 kV IEC/EN 61 000-4-5  
 Interference suppression: Limit value class B EN 55 011

### Degree of protection

Housing: IP 40 IEC/EN 60 529  
 Terminals: IP 20 IEC/EN 60 529

### Housing:

Thermoplastic with V0 behaviour  
 according to UL subject 94

### Vibration resistance:

Amplitude 0.35 mm  
 frequency 10 ... 55 Hz IEC/EN 60 068-2-6  
 20 / 060 / 04 IEC/EN 60 068-1

### Climate resistance:

### Terminal designation:

### Wire connection:

EN 50 005  
 2 x 2.5 mm<sup>2</sup> solid or  
 2 x 1.5 mm<sup>2</sup> stranded ferruled  
 DIN 46 228-1/-2/-3/-4

### Wire fixing:

Flat terminals with self-lifting  
 clamping piece IEC/EN 60 999-1  
 DIN rail IEC/EN 60 715

### Mounting:

### Dimensions

#### Width x height x depth

IL 9277: 35 x 90 x 61 mm  
 SL 9277, SL 9277CT: 35 x 90 x 100 mm  
 IP 9277: 70 x 90 x 61 mm  
 SP 9277, SP 9277CT: 70 x 90 x 100 mm


## Standard Types

IL 9277.12 AC 220 ... 240 V	
Article number:	0049306 stock item
SL 9277.12 AC 220 ... 240 V	
Article number:	0054111
• Single phase	
• 4 programmable ranges up to 15 A	
• de-energized on trip	
• Auxiliary voltage $U_H$ : AC 220 ... 240 V	
• 2 changeover contacts	
• Width 35 mm	
IP 9277.39 0.5 ... 5 A AC 220 ... 240 V	
Article number:	0049308 stock item
SP 9277.39 0.5 ... 5 A AC 220 ... 240 V	
Article number:	0056075
• 3-phase	
• Range 0.5 ... 5 A	
• de-energized on trip	
• Auxiliary voltage $U_H$ : AC 220 ... 240 V	
• 2 changeover contacts each for over- and undercurrent	
• Width 70 mm	


## Variants

IL 9277.12/010, SL 9277.12/010:	single phase current relay energized on trip
IP 9277.39/010, SP 9277.39/010:	3-phase current relay energized on trip
IP 9277.39/002, SP 9277.39/002:	3-phase current relay undercurrent de-energized on trip
SL 9277.12CT	overcurrent energized on trip single phase current relay with built in CT
SP 9277.39CT	3-phase current relay with built in CT

## Ordering example for variants

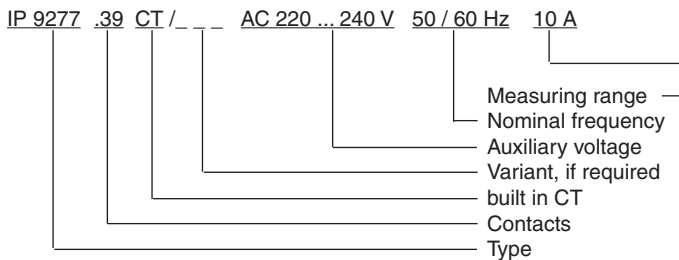

## Characteristics

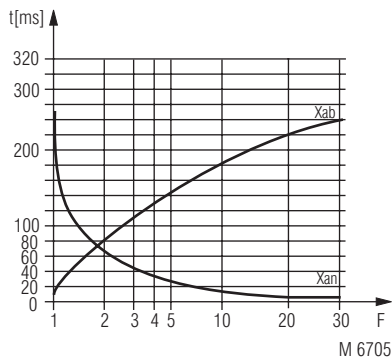

### Switching delay

The characteristic shows the switching delay depending on the values of  $X_{an}$  -  $X_{ab}$  when switching the current on or off. A slow current change reduces the delay.

$$F = \frac{I_{\text{applied}}}{I_{\text{setting}}}$$