


The information disclosed herein was originated by and is the property of Denitron Technologies. Denitron Technologies reserves all patent, proprietary, design, trade, manufacturing and reproduction rights therein.

REVISIONS		DATE	APPROVED
REV.	DESCRIPTIONS		
-	Released on ECN #1090	11/14/01	M. A.

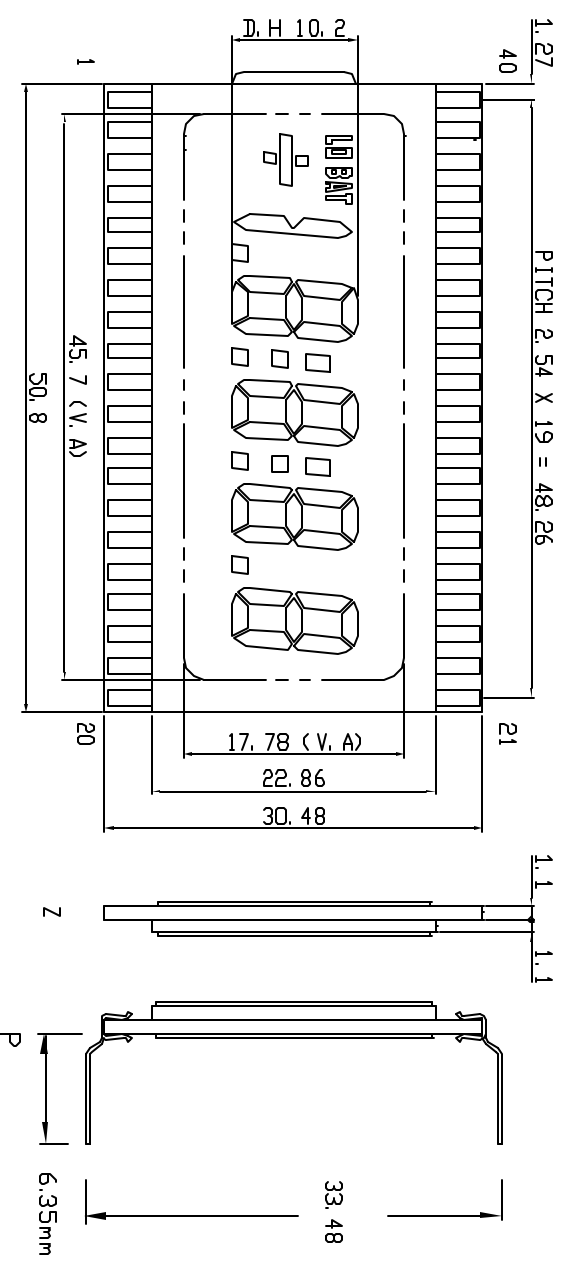

PINOUT:


Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	11	3c	21	1a	31	3f
2	-	12	3DP	22	1f	32	3g
3	K	13	2e	23	1g	33	L1
4	5DP	14	2d	24	2b	34	4b
5	4e	15	2c	25	2a	35	4a
6	4d	16	2DP	26	2f	36	4f
7	4c	17	1e	27	2g	37	4g
8	3e	18	1d	28	L2	38	LD BAT
9	3d	19	1c	29	3b	39	.
10		20	1b	30	3a	40	COM

Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
OPERATING TEMPERATURE (°C)	-0~50°C
STORAGE TEMPERATURE (°C)	-5~55°C
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-201203-1-XZ-W	ZEBRA TYPE	DG-201203-1-XP-W	PIN TYPE
Replace the 'X' in the above part number with 'R' for Reflective polarizer, 'B' for Transflective Polarizer, or 'F' for Transmissive Polarizer, add -W for Wide Temp.			



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MM. TOLERANCES ARE:	APPROVALS	DATE
X = ± 3	DRAWN	
.X = ± 0.5	CHECKED	
.XX = ± 0.05	ISSUED	
CAGE CODE #DVS52		

DENSITRON TECHNOLOGIES PLC	
LCD SEGMENTED GLASS	
DWG. NO.	DG-201203-1
SHEET 1 OF 1	