



VARIMETER Frequency Relay IL 9837, SL 9837

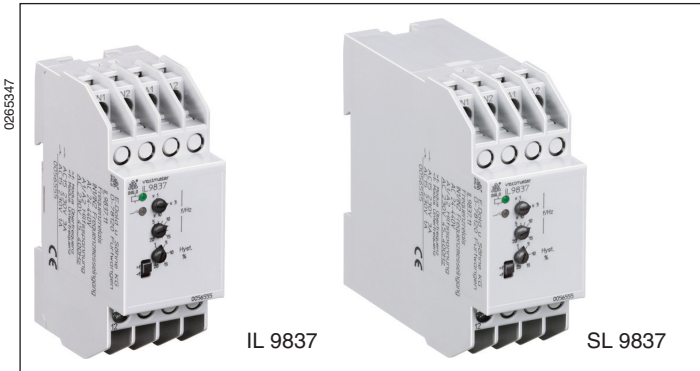


- According to IEC/EN 60 255, DIN VDE 0435-303
- Overfrequency or underfrequency monitoring of AC voltages
- Adjustable response value f_{min} or f_{max} 5 ... 200 Hz or 15 ... 600 Hz
- Adjustable hysteresis
- Large voltage range of the measuring input (nominal voltage AC 24 ... 440 V)
- De-energized on trip
- LED indication for auxiliary voltage, measuring voltage and contact position
- 1 changeover contact
- As option for frequency inverters with a range of 1 ... 300 Hz
- 2 changeover contacts available on request
- As option adjustable start-up delay available
- Energized on trip function available on request
- Devices available in 2 enclosure versions:
 - IL 9837: depth 58 mm, with terminals at the bottom for installation systems and industrial distribution systems according to DIN 43 880
 - SL 9837: depth 98 mm, with terminals at the top for cabinets with mounting plate and cable duct
- 35 mm width

Function Diagram

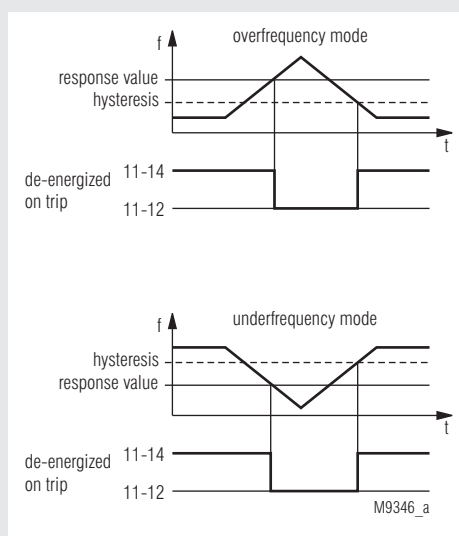

Circuit Diagram

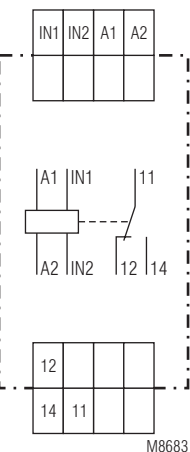

IL 9837, SL 9837

Approvals and Markings



Application

- Frequency monitoring of A.C. voltages
- Monitoring of the rotor frequency of slipping motors
- Control / monitoring of drives in crane systems
- Frequency monitoring in frequency inverters (IL 9837.11/500)

Function

The frequency to be monitored is applied to measuring input IN1-IN2. The measuring circuit is electrically separated from the auxiliary voltage input A1-A2, to which the supply voltage of the frequency relay is connected.

The measured frequency is compared to a response value to be set at the unit.

In overfrequency mode, the output relay switches into alarm position when the preset response value is exceeded. When the system frequency once more falls below the response value minus the preset hysteresis, the output relay will switch back into normal position.

In underfrequency mode, the output relay switches into alarm position when the actual value falls below the preset response value. When the system frequency once more exceeds the response value plus hysteresis, the output relay will switch back into normal position.


If de-energized on trip is selected, the output relay is energized (11-14 closed) in normal status.

If energized on trip is selected, the output relay is energized (11-14 closed) in alarm status.

Indicators

- Upper LED: green light is permanently on, when only the auxiliary voltage has been applied to A1-A2, green-red alternating light, when measuring frequency has also been applied to IN1-IN2
- Yellow LED: is on, when the output relay is energized (contacts 11-14 closed)

Setting

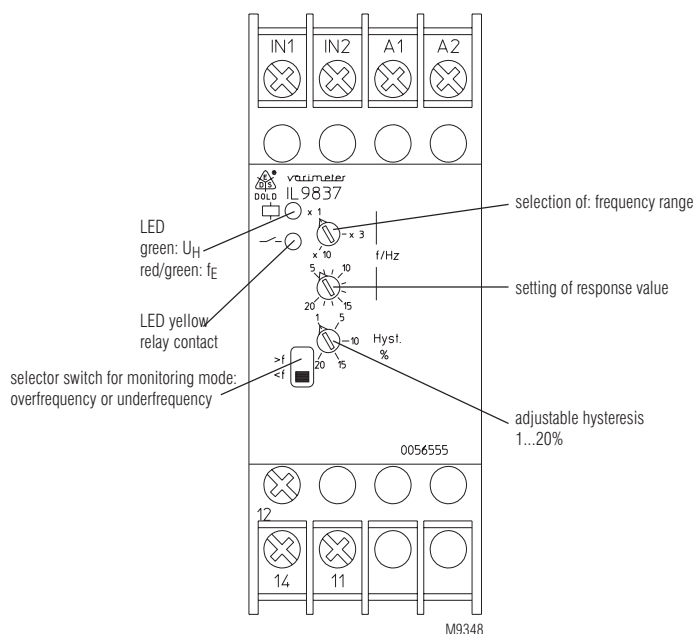

Notes

Monitoring mode underfrequency or overfrequency
The mode can be selected by means of the slide switch at the front of the unit. The operating mode de-energized or energized on trip as well as the response value do not change.

Setting of the hysteresis
With input frequencies < 15 Hz (4 Hz with variant IL 9837.11/500), the hysteresis should not be set to minimum values to avoid cycling of the output relay.

In the "underfrequency" monitoring mode ("<f"), with input frequencies close to the end of the respective range, hysteresis can only be set to a maximum of 4 ... 10% for proper resetting; this is due to reasons of the switching operation. If applicable, select the next higher frequency range.

Variant IL 9837.11/500 for frequency inverter
This variant can be used with frequency inverter to monitor the frequency of 1 ... 300 Hz generated by the frequency inverter. It has a specifically dimensioned measuring input with low pass character to suppress the cycle frequency of the inverter. Simultaneously, the input sensitivity is adjusted to the voltage/frequency characteristic of the inverter.

Technical Data

Measuring Circuit

Measuring input: IN1-IN2
Nominal voltage U_N : AC 24 ... 440 V
Voltage range: 0.8 ... 1.1 U_N
Input resistance: approx. 1 M Ω
Frequency range: 5 ... 20 Hz, 15 ... 60 Hz, 50 ... 200 Hz or 15 ... 60 Hz, 45 ... 180 Hz, 150 ... 600 Hz selected with rotary switch

Response value
infinitely adjustable: 1 : 4 in each frequency range
Hysteresis
infinitely adjustable: 1 ... 20 % of the set response value

Measuring input: IL 9837.11/500
Max. input voltage: AC 500 V
Min. measuring voltage: approx. AC 10 V with 1 Hz ... AC 220 V with 300 Hz, see diagramm M8681
Input resistance: approx. 700 k Ω
Frequency range: 1 ... 10 Hz, 5 ... 50 Hz, 30 ... 300 Hz selected with rotary switch

Response value
infinitely adjustable: 1 : 10 in each frequency range
Hysteresis
infinitely adjustable: 1 ... 20 % of the set response value

Technical Data

Auxiliary Circuit

Nominal voltage U_H : AC 24, 42, 115, 127, 230, 240, 400 V
DC 12, 24, 48 V

Voltage range
AC: 0.8 ... 1.1 U_H
DC: 0.9 ... 1.25 U_H

Nominal consumption
AC: approx. 1.5 VA
DC: approx. 1 Watt

Frequency range
AC: 45 ... 400 Hz

Output

Contacts: 1 changeover contact
Thermal current I_{th} : 4 A
Switching capacity
to AC 15
NO contact: 3 A / AC 230 V IEC/EN 60 947-5-1
NC contact: 1 A / AC 230 V IEC/EN 60 947-5-1
to DC 13:
NO contact: 1 A / DC 24 V IEC/EN 60 947-5-1
NC contact: 1 A / DC 24 V IEC/EN 60 947-5-1
Contact life:
to AC 15 at 1 A, AC 230V: 1.5 x 10⁵ switch. cycles IEC/EN 60 947-5-1
Short circuit strength
max. fuse rating: 4 A gL IEC/EN 60 947-5-1
Mechanical life: $\geq 30 \times 10^6$ switching cycles

General Data

Nominal operation: Continuous
Temperature range: - 20 ... + 60°C
Clearance and creepage distances
Rated impulse voltage /
Pollution degree: 4 kV / 2
EMC
Electrostatic discharge (ESD): 8 kV (air) IEC/EN 61 000-4-2
Fast transients: 2 kV IEC/EN 61 000-4-4
Surge
between
supply lines: 1 kV IEC/EN 61 000-4-5
HF voltage driven: 10 V IEC/EN 61 000-4-5
Interference suppression: Limit value class B EN 55 011
Degree of protection
Housing: IP 40 IEC/EN 60 529
Terminals: IP 20 IEC/EN 60 529
Housing: Thermoplast with V0 behavior according to UL Subject 94
Vibration resistance: Amplitude 0.35 mm
Frequency 10 ... 55 Hz IEC/EN 60 068-2-6
20 / 060 / 04 IEC/EN 60 068-1
Climate resistance:
Terminal designation: DIN EN 50 005
Wire connection: 2 x 2.5 mm² massive, or 2 x 1.5 mm² stranded wire ferruled
DIN 46 228-1/-2/-3
Screw terminals with self-lifting clamping piece IEC/EN 60 999-1
DIN rail IEC/EN 60 715
Wire fixing:
Mounting:
Net weight
IL 9837: approx. 137 g
SL 9837: approx. 164 g

Dimensions

Width x height x depth
IL 9837: 35 x 90 x 59 mm
SL 9837: 35 x 90 x 98 mm

Standard Type

IL 9837.11 5 ... 200 Hz U_H AC 230 V Hyst. 1 ... 20 %

Article number: 0056555


- De-energized on trip
- Selection of overvoltage or undervoltage
- Selectable
 - frequency range: 5 ... 20 Hz, 15 ... 60 Hz, 50 ... 200 Hz
- Response value: Infinitely adjustable 1:4
- Auxiliary voltage U_H : AC 230 V
- Hysteresis: 1 ... 20 % adjustable
- Output contact: 1 changeover contact
- Width: 35 mm

Variants


- IL 9837.11/500: Input designed for frequency inverters
 Selection of overfrequency or underfrequency
 Selectable frequency range
 1 ... 10 Hz, 5 ... 50 Hz, 30 ... 300 Hz
 Response value infinitely adjustable 1:10
 Auxiliary voltage U_H AC 230 V
 De-energized on trip
 Output contact 1 changeover contact
- IL 9837.11/_ _4: with adjustable start-up delay
 0.1 ... 20 s

Ordering example for variants

IL 9837 .11 / _ _ 5 ... 200 Hz U_H AC 230 V 1 ... 20 %

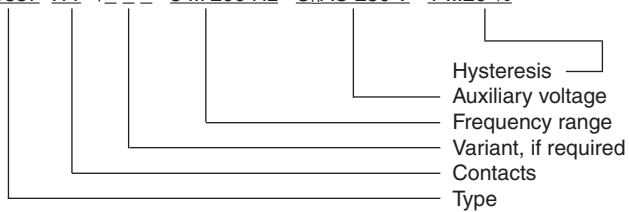

Characteristic

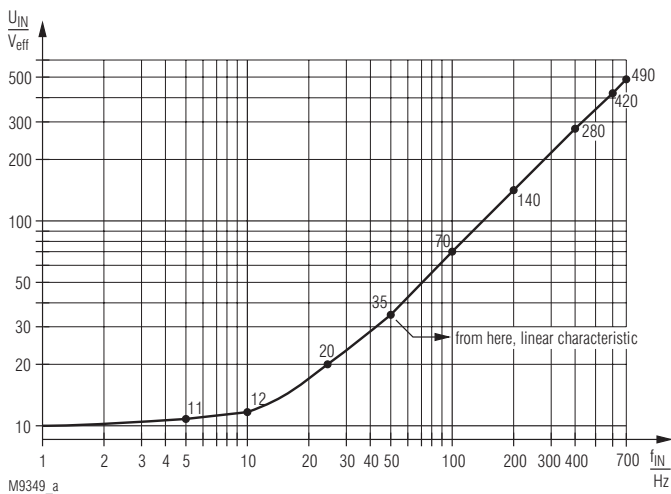

Typical input sensitivity of the measuring input
 with variant IL 9837.11/500

Anschlußbeispiel

