


The information disclosed herein was originated by and is the property of Densitron Technologies. Densitron Technologies reserves all patent, proprietary, design, sale, manufacturing and reproduction rights thereto.


REVISIONS

REV.	DESCRIPTIONS	DATE	APPROVED
-	Released on ECN #1091	11/13/00	M. A.

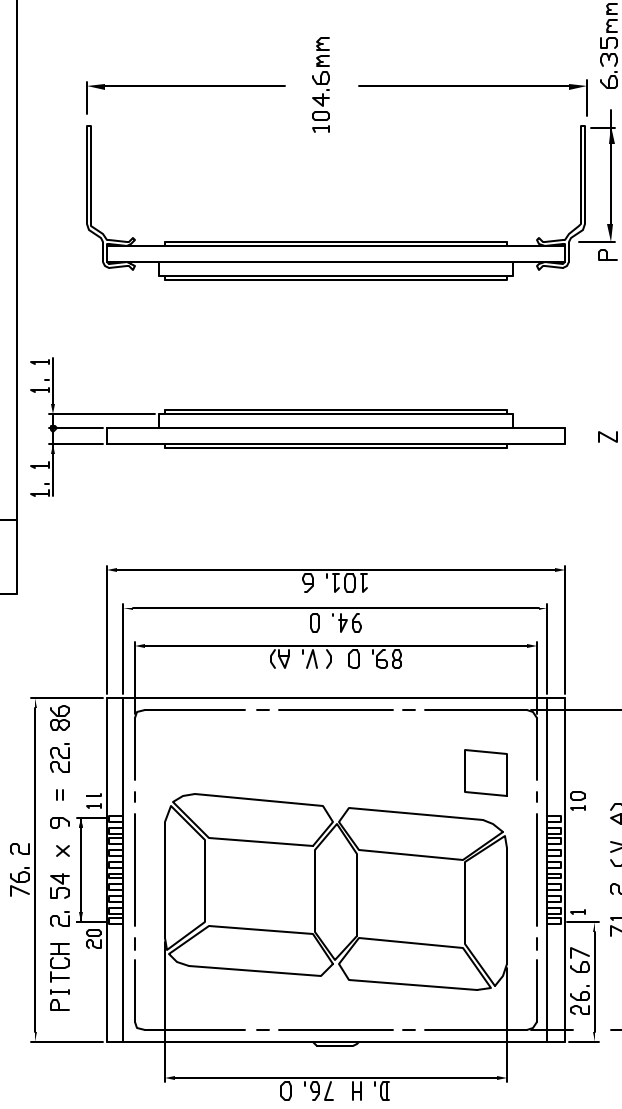

PINOUT:

Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.	Pin No.	Seg.
1	COM	6	d	11	g	16	NC
2	COM	7	c	12	g	17	a
3	e	8	c	13	b	18	a
4	e	9	DP	14	b	19	f
5	d	10	DP	15	NC	20	f



Specifications:

CONNECTION TYPE	Pin or Zebra
DUTY	Static 1/1
DISPLAY MODE	Positive
DRIVING VOLTAGE (V)	5V
POLARIZER GRADE	Commercial
VIEWING DIRECTION	6 o'clock
WIDE OPERATING TEMPERATURE (°C)	-20~80°C
WIDE STORAGE TEMPERATURE (°C)	-25~85°C

Ordering Information

DG-1098-XZ-W	ZEBRA TYPE	DG-1098-XP-W	PIN TYPE
Replace the "X" in the above part number with "R" for Reflective polarizer, "B" for Transmissive Polarizer, or "F" for Transmissive Polarizer, added -W for Wide Temp.			

APPROVALS	DATE	DENSITRON TECHNOLOGIES PLC.	
DRAWN		TITLE LCD SEGMENTED GLASS	
CHECKED		DWG. NO. DG-1098	
ISSUED		SHEET 1 OF 1	