Proximity Inductive Sensors Standard range, Nickel-Plated Brass Housing Types ICB, M12





- Sensing distance: 2 to 4 mm
- Flush and non-flush types
- Short and long body versions
- Rated operational voltage (U_b): 10 36 VDC
- Output: DC 200 mA, NPN or PNP
- · Normally open, Normally closed
- LED indication for output ON
- Protection: reverse polarity, short circuit, transients
- Cable and M12 plug versions
- According to IEC 60947-5-2
- Higher resistance to magnetic field
- CSA certified for Hazardous Locations

Product Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where

high sensing range is requested.
Output is open collector NPN or PNP transistors.

Ordering Key	ICB12SF02NOM1
Туре	
Housing style	
Housing material	
Housing size	
Housing length	
Detection principle	
Sensing distance	
Output type	
Output configuration	
Connection	

Type Selection

Connection	Body style	Rated operating distance S _n	Ordering no. NPN Normally open	Ordering no. PNP Normally open	Ordering no. NPN Normally closed	Ordering no. PNP Normally closed
Cable	Short	2 mm 1)	ICB 12 SF 02 NO	ICB 12 SF 02 PO	ICB 12 SF 02 NC	ICB 12 SF 02 PC
Cable	Short	4 mm ²)	ICB 12 SN 04 NO	ICB 12 SN 04 PO	ICB 12 SN 04 NC	ICB 12 SN 04 PC
Plug	Short	2 mm ¹⁾	ICB 12 SF 02 NOM1	ICB 12 SF 02 POM1	ICB 12 SF 02 NCM1	ICB 12 SF 02 PCM1
Plug	Short	4 mm ²)	ICB 12 SN 04 NOM1	ICB 12 SN 04 POM1	ICB 12 SN 04 NCM1	ICB 12 SN 04 PCM1
Cable	Long	2 mm 1)	ICB 12 LF 02 NO	ICB 12 LF 02 PO	ICB 12 LF 02 NC	ICB 12 LF 02 PC
Cable	Long	4 mm ²⁾	ICB 12 LN 04 NO	ICB 12 LN 04 PO	ICB 12 LN 04 NC	ICB 12 LN 04 PC
Plug	Long	2 mm 1)	ICB 12 LF 02 NOM1	ICB 12 LF 02 POM1	ICB 12 LF 02 NCM1	ICB 12 LF 02 PCM1
Plug	Long	4 mm ²)	ICB 12 LN 04 NOM1	ICB 12 LN 04 POM1	ICB 12 LN 04 NCM1	ICB 12 LN 04 PCM1

¹⁾ For flush mounting in metal

Specifications

Rated operational voltage (U _b)	10 to 36 VDC (ripple incl.)
Ripple	≤ 10%
Output current (I _e)	≤ 200 mA @ 50°C (≤ 150 mA @ 50-70°C)
OFF-state current (I _r)	≤ 50 µA
No load supply current (I _O)	≤ 15 mA
Voltage drop (U _d)	Max. 2.5 VDC @ 200 mA
Protection	Reverse polarity, short-circuit, transients
Voltage transient	1 kV/0.5 J
Power ON delay (t _v)	300 ms
Operating frequency (f)	≤ 2000 Hz
Indication for output ON NO version NC version	Activated LED, yellow Target present Target not present

Indication for short circuit/ overload	LED blinking
Assured operating sensing distance (S _a)	$0 \le S_a \le 0.81 \times S_n$
Effective operating distance (S _r)	$0.9 \times S_n \le S_r \le 1.1 \times S_n$
Usable operating distance (S _u)	$0.9 \ x \ S_r \leq S_u \leq 1.1 \ x \ S_r$
Repeat accuracy (R)	≤ 10%
Differential travel (H)	
(Hysteresis)	1 to 20% of sensing dist.
Ambient temperature Operating Storage	-25° to +70°C (-13° to +158°F) -30° to +80°C (-22° to +176°F)
Shock and vibration	IEC 60947-5-2/7.4
Housing material Body Front	Nickel-plated brass Grey thermoplastic polyester

²⁾ For non-flush mounting in metal





Specifications (cont.)


Connection		
Cable	2 m, 3 x 0.25 mm ² , grey PVC, oil proof	
Plug	M12 x 1	
Degree of protection	IP 67	1
Weight (cable/nuts included) Cable Plug	Max. 120 g Max. 30 g	n (
Dimensions	See diagrams below	a
Tightening torque Distance from sensing face		
from 2 mm to 5 mm	4 Nm	(
> 5 mm	10 Nm	E
Approvals		•
UL (cRUus), CSA	As Industrial Control Equipment - Proximity Switches. Types 1, 4, 4X or 12. Max ambient temperature 40°C.	


Approvals (cont.)	
Note: The terminal connector (versionM1) was not evaluated. The suitability of the terminal connector should be determined in the end-use application.	As Process Control Equipment for Hazardous Locations Class I, Division 2, Groups A, B, C and D Class I, Zone 1, AEx/Ex d IIB+H2, T5, Enclosure Type 4. Ambient temperature Ta: -25° to +60°C. Note: AEx for USA, Ex for Canada
CE-marking	Yes
EMC protection IEC 61000-4-2 (ESD) IEC 61000-4-3 IEC 61000-4-4 IEC 61000-4-6 IEC 61000-4-8	According to IEC 60947-5-2 8 KV air discharge, 4 KV contact discharge 3 V/m 2 kV 3 V 30 A/m


Dimensions

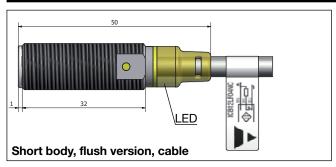


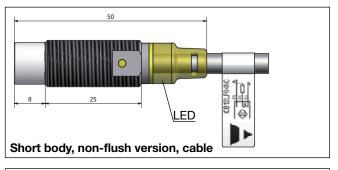

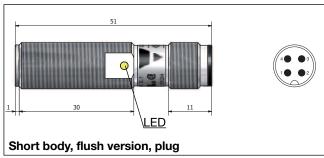

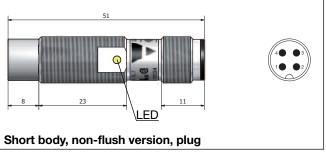


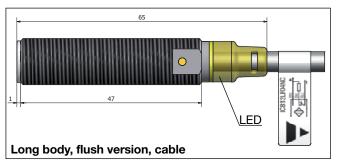


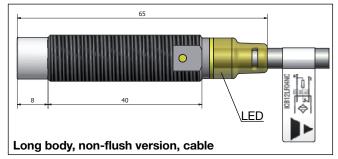




Dimensions (cont.)

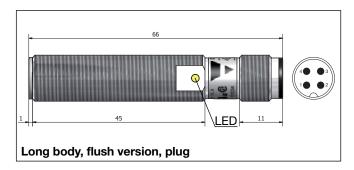

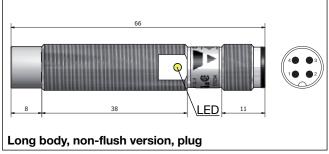


Installation


Flush sensor, when installed in damping material, must be according to Picture 1A.

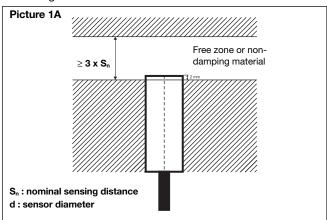


Non-flush sensor, when installed in damping material, must be according to Picture 1B.

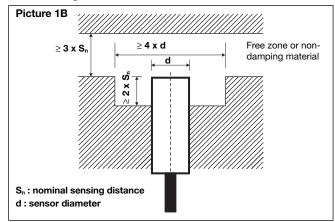


Flush sensors, when installed together in damping material, must be according to Picture 2A.

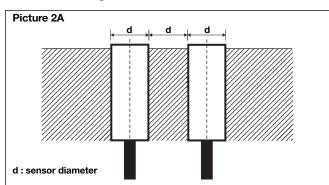

Non-flush sensors, when installed together in damping material, must be according to Picture 2B.

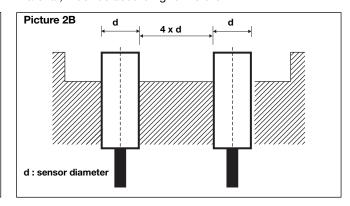



For sensors installed opposite each other, a minimum space of $6 \times Sn$ (the nominal sensing distance) must be observed (See Picture 3).

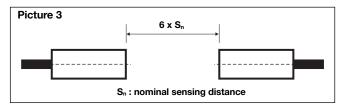





Wiring Diagrams










Reduction factors

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

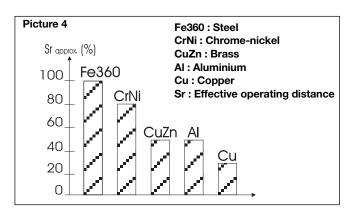

Accessories for Plug Versions

3-wire angled connector, 2 m cable	CONM13NF-A2
3-wire angled connector, 5 m cable	CONM13NF-A5
3-wire angled connector, 10 m cable	CONM13NF-A10
3-wire stright connector, 2m cable	CONM13NF-S2
3-wire stright connector, 5m cable	CONM13NF-S5
For any additional information or different options, please refer to the "General Accessories" datasheets.	

Delivery Contents

- Inductive proximity switch ICB.
- 2 nuts NPB
- · Packaging: plastic bag